

**Scope**

This specification applies to built-in DC stabilized power supply, UZP-120-\*\*-J\*\*\*-\*.  
 In addition, all items in this specification shall be provided at nominal temperature and humidity unless otherwise specified.

**Model Name Coding**

Example : U Z P - 1 2 0 - 1 2 - J B 0 □ - C  
                   ①      ②      ③      ④⑤⑥⑦⑧

- ①Series Name....."UZP" : UZP series
- ②Continuous output power....."120" : 120W (12-J0L type,12-JB0 type:100W)
- ③Output voltage....."12" : 12V,"24" : 24V
- ④Input/Output connector type....."J" : Nylon connector
- ⑤Optional joint connector....."0" : without connector, "B" : with connector
- ⑥Presence or absence of function  
     "L" : Without output ON/OFF control signal, Without variable resistor to adjust output voltage  
     "0" : With output ON/OFF control signal, With variable resistor to adjust output voltage  
     "H" : With output ON/OFF control signal, With variable resistor to adjust output voltage,  
         high-efficiency type
- ⑦Modification....."Blank" : Standard,"1 to 9"or"A to Z"A~Z : Modification symbol
- ⑧Chassis....."C" : With chassis,"K" : With chassis and cover, "Blank" : Without chassis and cover

**General specification**

Items	Specification					Measurements conditions, etc.	
	UZP-120-						
	12		24				
		-J0L, -JB0	-JBH	-J0L, -JB0	-JBH		
AC Input	Rated Voltage	100-240VAC				Worldwide range	
	Voltage range	85-264VAC				Load factor shall be 95-100% in range of 85-90VAC input.	
	Current	At 100VAC	1.16A <sub>typ</sub>	1.35A <sub>typ</sub>	1.35A <sub>typ</sub>	1.32A <sub>typ</sub>	At continuous rated output1
			1.87A <sub>typ</sub>	1.83A <sub>typ</sub>	1.82A <sub>typ</sub>	1.78A <sub>typ</sub>	At continuous rated output2
		At 200VAC	0.62A <sub>typ</sub>	0.73A <sub>typ</sub>	0.72A <sub>typ</sub>	0.71A <sub>typ</sub>	At continuous rated output1
			1.00A <sub>typ</sub>	0.98A <sub>typ</sub>	0.98A <sub>typ</sub>	0.96A <sub>typ</sub>	At continuous rated output2
	Rated Frequency	50-60 Hz				Frequency range 47-63Hz	
	Inrush current	At 100VAC	17A <sub>typ</sub>				Power thermistor system At cold start(25°C)
		At 200VAC	34A <sub>typ</sub>				
	Efficiency	At 100VAC	87.5% <sub>typ</sub>	89.5% <sub>typ</sub>	90.0% <sub>typ</sub>	92.0% <sub>typ</sub>	At 100W load
At 200VAC		90.0% <sub>typ</sub>	91.5% <sub>typ</sub>	92.0% <sub>typ</sub>	94.0% <sub>typ</sub>		
Power factor	At 100VAC	99% <sub>typ</sub>				At continuous rated output1	
	At 200VAC	90% <sub>typ</sub>					

Note:




Drawn by Yodo	Checked by Yamada	Approved by Yamamoto	Model: UZP-120-**-J***-*	Drawing No. 3 4 3 1 - 0 1 - 4 - 5 2 0
				1/11

Items			Specification		Measurements conditions, etc.	
			12	24		
Environment	Operating Temp.	Natural air cooling	-10 to 60°C (Open frame)		Refer to "Output derating specification"	
			-10 to 55°C (With chassis and cover)			
		Forced air cooling	-10 to 70°C (Open frame)			Refer to "Output derating specification"
			-10 to 70°C (With chassis and cover)			
	Operating Humidity		20 to 90%RH			
	Storage Temp./Humidity		-20 to 85°C/10 to 95%RH		There shall be no condensation	
	Vibration		To endure the vibration acceleration of 2G with vibration frequency of 10 to 55Hz for 10 sweep cycles in each X,Y,Z direction		Follow JIS-C-60068-2-6 At no operation	
Mechanical Shock		Left one bottom edge of the unit 50mm high with the opposite edge placed in the test bench, and let it fall. Repeat 3 times for each of 4 bottom edges, and no malfunction shall be observed.		Follow JIS-C-60068-2-31 At no operation		
Insulation	Dielectric strength	3kVAC/1 minute between input and output/RC		Cut-off current 10mA		
		2kVAC/1 minute between input and FG		Cut-off current 10mA		
		500VAC/1 minute between each output/RC/FG		Cut-off current 100mA		
	Insulation resistance	50mΩ min. between each input/output/RC/FG		At 500VDC		
Leakage current		0.06mA typ.(At 100VAC), 0.12mA typ.(At 200VAC)				
Others	Electrostatic Discharge		IEC61000-4-2 test level 3 compliant (Contact discharge ±6kV,10 times)		Apply to FG and chassis. There shall be no malfunction, nor failure	
	Line noise immunity		±2000V (pulse width of 100/1000nS, cycle period of 30 to 100Hz, Normal/Common mode with Positive/Negative polarity for 10minutes)		There shall be no fluctuation of DC output or malfunction.	
	Impulse voltage immunity		IEC-61000-4-5(Installation environment 3) compliant; apply 5 times each of Common mode ±4kV and Normal mode ±2kV		There shall be no malfunction, nor failure	
	Conducted emission		VCCI,FCC,CISPR22, and EN55022 class B compliant		Rated input and continuous rated output. Measured with chassis.	
	Harmonic current regulations		IEC61000-3-2(edition 2.1) class D, EN61000-3-2(A14) class D compliant		Rated input and continuous rated output.	
	Safety standard		UL60950-1, CSA60950-1(c-UL), CE marking(IEC62368-1)▲▲			
					PSE(Ordinance item 2) compliant	
	Cooling system		Natural air cooling			
	Dimension and Weight		62mm×24mm×155mm (W×H×D) /250g typ.		Without chassis and cover	
72mm×38.8mm×185mm (W×H×D) /430g typ.			With chassis and cover			
Warranty		Three years after delivery: if any defects belong to us, the defective unit shall be repaired or replaced at our cost.		Except for errors caused by operation not specified in this specification		

Note:

▲× 1:2020.06.16 *Nipron* 320203A  
▲× 1:2020.02.05 *Nipron* I-320203



Drawn by Yodo	Checked by Yamada	Approved by Yamamoto	Model: UZP-120-**-J***-*	Drawing No. 3431-01-4-520A
------------------	----------------------	-------------------------	-----------------------------	-------------------------------


Output specification							
Items		Specification				Measurements conditions, etc.	
		12		24			
		-JOL, -JB0	-JBH	-JOL, -JB0	-JBH		
Output rating	Rated Voltage	12V		24V		At rated input. Refer to "Output derating specification".	
	Continuous rated output 1 (Natural air cooling)	Current	8.4A	10.0A	5.0A		
		Power	100.8W	120.0W	120.0W		
	Continuous rated output 2 (Forced air cooling)	Current	13.5A		6.75A		
		Power	162W		162W		
	Peak rated output (10s Max.)	Current	16.7A		8.4A		Refer to "Peak output specification" Natural air cooling and forced air cooling.
Power		200.4W		201.6W			
Output characteristics	Factory Setting		-JOL: 12V±4% -JB0: 12V±2%	12V±2%	-JOL: 24V±4% -JB0: 24V±2%	24V±2%	At continuous rated output1
	Adjustable Voltage Range		12V -5%, +10%		24V -5%, +20%		*1.
	Static Input Regulation		48mV max.		94mV max.		
	Static Load Regulation		100mV max.		150mV max.		
	Temperature Regulation		0.02%/°C max.				
	Ripple Voltage	0 to +70°C	120mVp-p max.				Connect 150mm max. lead wire to output connectors, and then connect a 10uF electrolytic capacitor with a 0.1uF ceramic capacitor in parallel to the other ends of the wires to measure by an oscilloscope with 100MHz frequency band.
		-10 to 0°C	160mVp-p max.				
Spike Voltage	0 to +70°C	150mVp-p max.					
	-10 to 0°C	180mVp-p max.					
Protection circuit	Over Current Protection	OCP point	101% min. of peak rated current				
		Method	Blocking oscillation				
		Recovery	Automatic recovery				
	Over Voltage Protection	OVP point	13.8 to 16.2V		30.0 to 35.0V		
		Method	Output shutdown(latch lock)				
		Recovery	Reclosing of AC input				

Note:

\*1. Model:UZP-120-\*\*-J\*L-\* is equipped without this function.



Drawn by	Yodo	Checked by	Yamada	Approved by	Yamamoto	Model:	UZP-120-**-J***-*	Drawing No.	3 4 3 1 - 0 1 - 4 - 5 2 0
									3/11

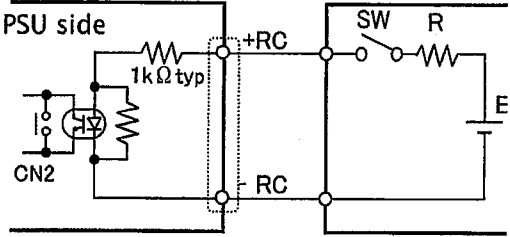Signal Input/Output Specification								
Items	Specification	Signal circuit						
	UZP-120							
Input signal	<p>*2. Output ON/OFF control signal (RC signal)</p>	<p>Connecting example in the case of using external power supply</p> 						
	<p><u>Operating mode</u></p> <table border="1"> <tr> <td>Between +RC and -RC</td> <td>CH1</td> </tr> <tr> <td>SW ON (4.5V min.)</td> <td>ON</td> </tr> <tr> <td>SW OFF (0.8V max.)</td> <td>OFF</td> </tr> </table>		Between +RC and -RC	CH1	SW ON (4.5V min.)	ON	SW OFF (0.8V max.)	OFF
	Between +RC and -RC		CH1					
	SW ON (4.5V min.)		ON					
SW OFF (0.8V max.)	OFF							
<p><u>External power supply and Load-limiting resistor</u></p> <table border="1"> <tr> <td>External power supply : E</td> <td>Load-limiting resistor : R</td> </tr> <tr> <td>4.5 to 12.5Vdc</td> <td>Not required</td> </tr> <tr> <td>12.5 to 30Vdc</td> <td>1.5kΩ</td> </tr> <tr> <td>30 to 48Vdc</td> <td>8.2kΩ</td> </tr> </table>	External power supply : E	Load-limiting resistor : R	4.5 to 12.5Vdc	Not required	12.5 to 30Vdc	1.5kΩ	30 to 48Vdc	8.2kΩ
External power supply : E	Load-limiting resistor : R							
4.5 to 12.5Vdc	Not required							
12.5 to 30Vdc	1.5kΩ							
30 to 48Vdc	8.2kΩ							
<p><u>Shorting Plug</u>                      With shorting plug(CN2) connected, Output starts up when AC input is applied regardless of RC signal.                      To control start/stop of output by RC signal, uncap shorting plug of CN2.</p> <p>Besides, when start/stop of output controlled by RC signal, make sure to operate RC signal after equipped switch or relay etc. in the route.</p> <p>Note: Shorting Plug (CN2) is primary circuit components.                      Make sure to operate the plug after the AC input is turned off.</p>								


Note:

\*2. Model:UZP-120-\*\*-J\*L-\* is equipped without this function.



Drawn by	Yodo	Checked by	Yamada	Approved by	Yamamoto	Model:	UZP-120-**-J***-*	Drawing No.	3 4 3 1 - 0 1 - 4 - 5 2 0
									4/11

●Sequence Timing Diagram

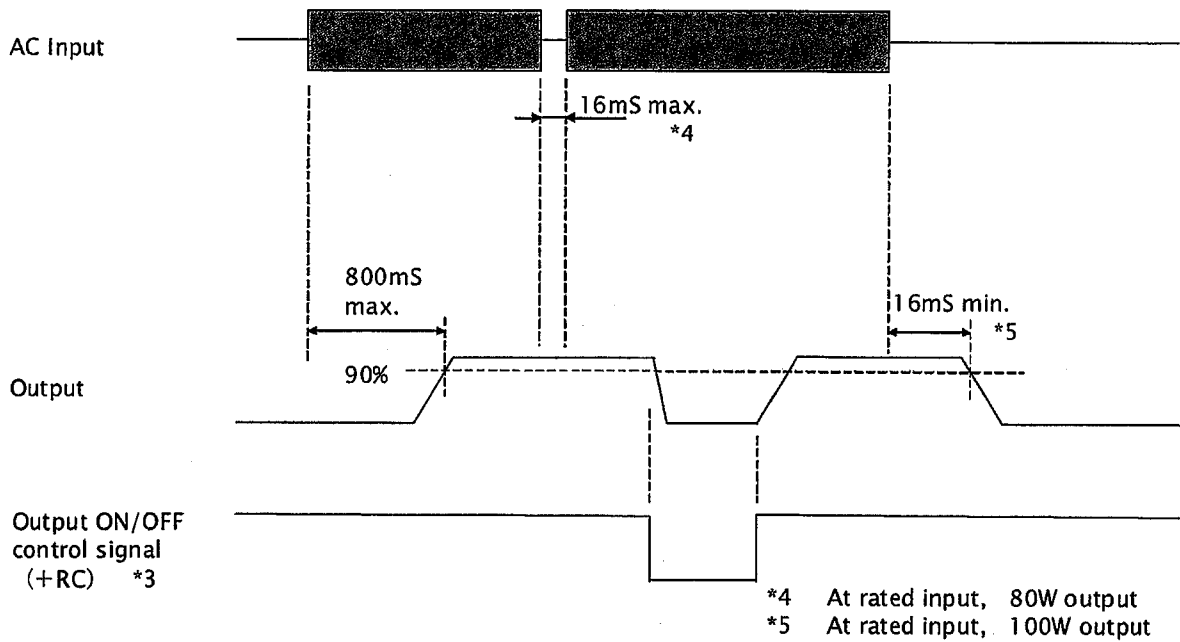

\*3 Model:UZP-120-\*\*-J\*L is equipped without the function of output ON/OFF control.

Note:



Drawn by Yodo	Checked by Yamada	Approved by Yamamoto	Model: UZP-120-**-J***-*	Drawing No. 3 4 3 1 - 0 1 - 4 - 5 2 0
				5/11

**●Peak Output Specification**

Peak output current shall meet the conditions below.

- Duty ratio of peak current shall be 30% or less.
- Energized period of peak current shall be 10 seconds or less.
- In the case that the ambient temperature is 40°C or higher with natural air cooling, the energized period of peak current shall be 5seconds or less.
- The value resulting from the formula below shall not exceed the continuous rated current,  $I_o$ , after derating specified in "Output derating" item.

$$\sqrt{((I_p^2 \times D) + (I_m^2 \times (1 - D)))} \leq I_o$$

$I_p$  = Peak current value


$I_m$  = Min. current value

$D$  = Duty ratio,  $t/T$

$t$  = Pulse width of peak current

$T$  = Cycle

$I_o$  = Continuous rated current specified in "Output derating" item

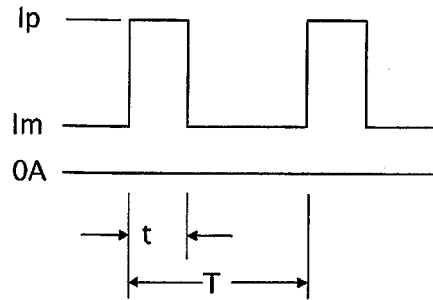

Note:





Drawn by Yodo	Checked by Yamada	Approved by Yamamoto	Model: UZP-120-**-J***-*	Drawing No. 3 4 3 1 - 0 1 - 4 - 5 2 0
				6/11

**● Output Derating Based on Ambient Temperature, Installation Direction and Cooling Condition**

Follow the derating diagram below for output according to the ambient temperature and installation direction.

In case of using the type with chassis and cover, input voltage range shall be 90VAC or higher, and shall not use in direction (F). Also, forced air cooling condition in the diagram shall be provided that the air flow 1.5m/s is applied from the direction shown below.

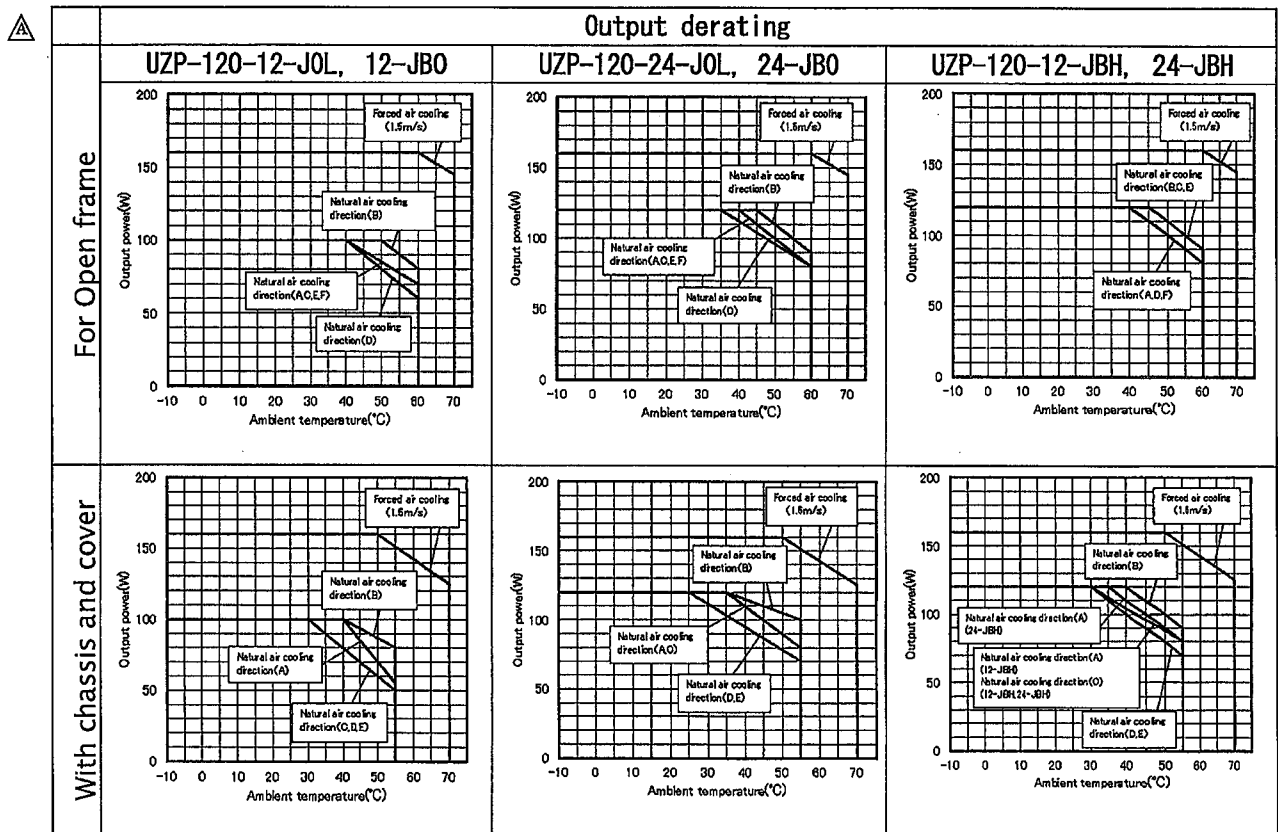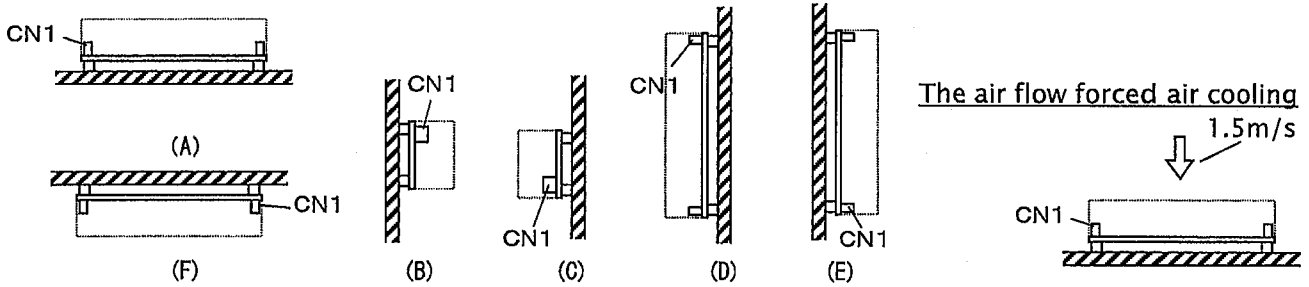


△ × 2:2020.04.10 M.Okudaira I-320414

Drawn by Yodo	Checked by Yamada	Approved by Yamamoto	Model: UZP-120-**-J***-	Drawing No. 3 4 3 1 - 0 1 - 4 - 5 2 0 A
				7/11

**●Output Derating vs. Input Voltage**

When input voltage is 90VAC or lower, follow the derating diagram below to reduce the continuous rated current and power.

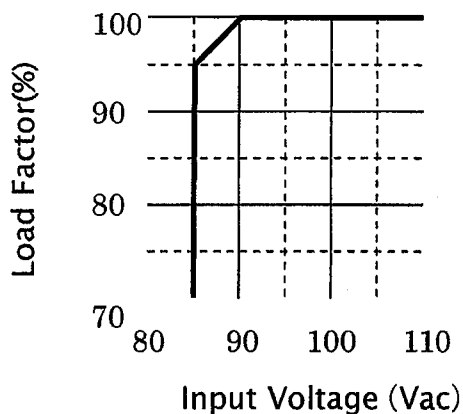


Note:



Drawn by Yodo	Checked by Yamada	Approved by Yamamoto	Model: UZP-120-**-J***-*	Drawing No. 3 4 3 1 - 0 1 - 4 - 5 2 0 8/11
------------------	----------------------	-------------------------	-----------------------------	--



●Circuit Block Diagram

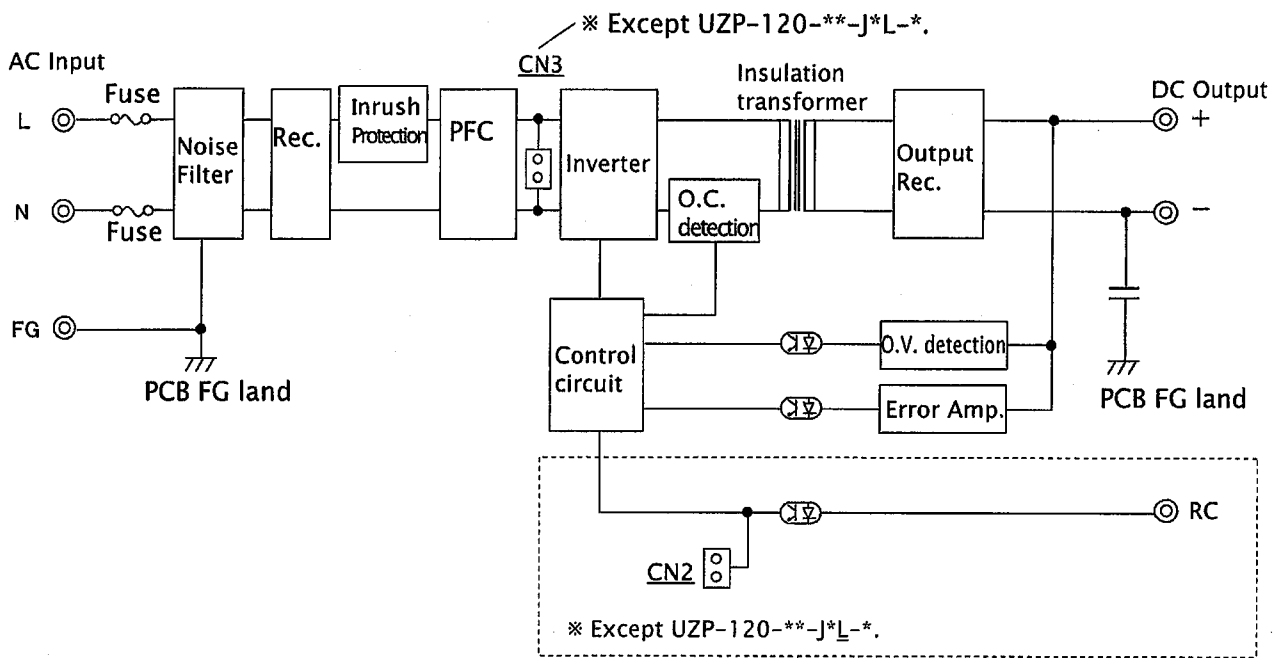

Note:




Drawn by	Yodo	Checked by	Yamada	Approved by	Yamamoto	Model:	UZP-120-**-J***-	Drawing No.	3 4 3 1 - 0 1 - 4 - 5 2 0
									9/11

Nipron Co.,Ltd.

Due to the technical improvement, the specifications and functions are subject to change without notice.


**●Power Supply Installation**

- To meet standard of insulation and dielectric withstanding, install the power supply to keep the dimensions, d1, d2 and d3, shown in the drawing below.
- Install the power supply so that natural air convection and air ventilation are expected to keep the temperature rise around the power supply low.

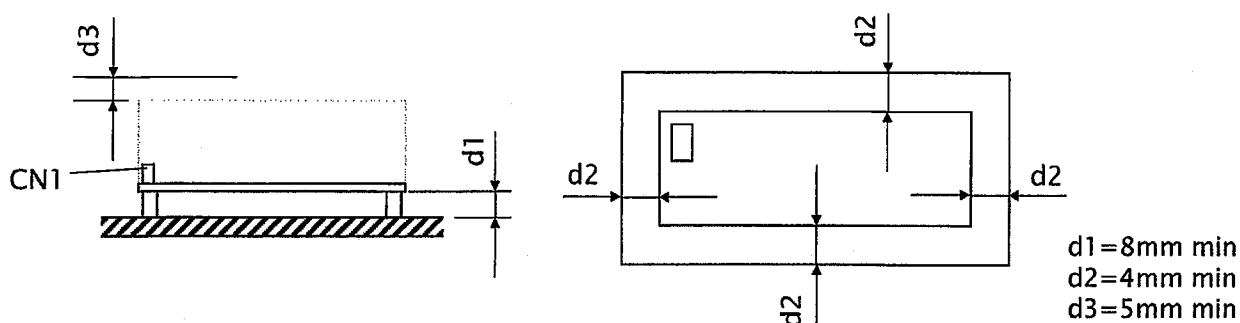


**●Mounting Screws and Grounding of Power Supply**

- Fix 4 screws firmly at power supply mounting holes.
- Use 3mm diameter screws for mounting power supply.
- Do not use the metal mounting parts that exceed the hatched area shown below.
- In mounting the unit with chassis and cover, do not use any screws that exceed the dimension shown below.
- Make sure to connect FG terminal of CN1 or FG portion of PCB to customer's safety grounding. Also, make sure to connect FG terminal of CN1 to the safety ground of the customer's system in the case of safety standard application.
- Be recommended to connect the FG portion of solder face of PCB to customer's metal system body with metal parts such as metal spacers to reduce noise.

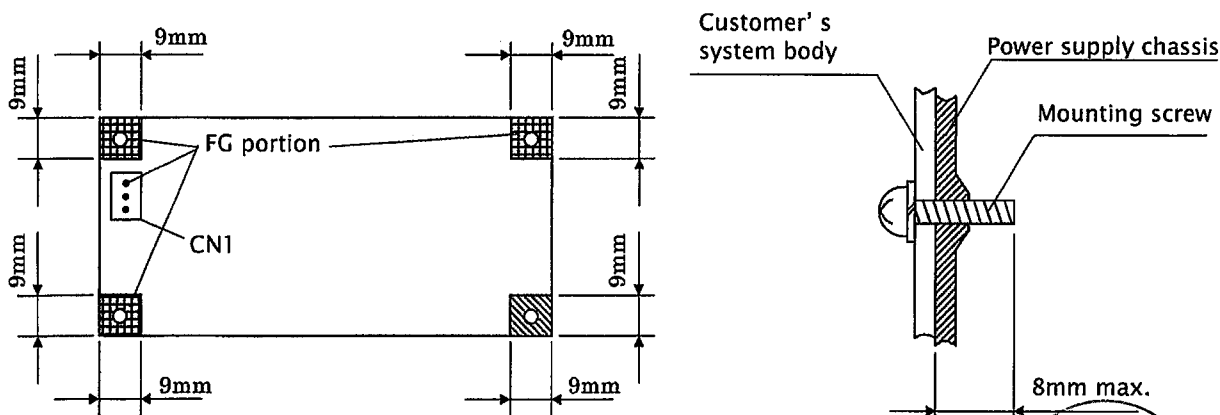

Note:



Drawn by Yodo	Checked by Yamada	Approved by Yamamoto	Model: UZP-120-**-J***-*	Drawing No. 3 4 3 1 - 0 1 - 4 - 5 2 0 10/11
------------------	----------------------	-------------------------	-----------------------------	---

Precautions before use

1. Grounding ⚠ Warning  
 This unit is designed and produced to meet Class I equipment. Make sure to connect the grounding terminal of the unit to grounding in a proper way for safety.
2. Electric shock ⚠ Warning  
 This unit is designed and produced as built-in equipment and high-voltage part inside. Make sure to securely install in the equipment in a proper way to prevent electric shock. Also, shorting plug (CN2) for RC signal setting is primary circuit components. When the plug is handled, make sure to turn off AC input before the handling of the plug.
3. PCB handling ⚠ Caution  
 In handling, use the edge of the PCB so as not to touch the component sides. Lift the PCB from the equipment with filter pieces in installation. Besides, handle the PCB with care to prevent twisting or bending of the PCB board as it has SMT components on it.
4. Output short circuit ⚠ Caution  
 Prevent shorting outputs. When output is shorted, capacitors inside the power supply rapidly discharge leading to fire and/or spark resulting in serious accident. It also shortens the lifetime of the power supply.
5. Inrush current control circuit ⚠ Caution  
 To prevent inrush current into rectifying capacitors when AC input is turned on, a power thermistor is used. When AC input is turned on before the temperature of the thermistor goes low after turning off, huge inrush current may occur. Make sure to keep 60-second period at least before reclosing of AC input.
6. Output energy ⚠ Caution  
 The output energy of this unit is 240VA or more, and regarded dangerous. Any operators must not touch the unit. Besides, apply necessary measures to prevent service personnel or service tools to touch accidentally the equipment with this unit installed. Make sure that the output voltage of this unit goes down to the safe level before servicing after the input voltage is turned off.



Drawn by	Yodo	Checked by	Yamada	Approved by	Yamamoto	Model: UZP-120-**-J***-*	Drawing No. 3 4 3 1 - 0 1 - 4 - 5 2 0
							11/11

