

Scope

This specification applies to built-in DC stabilized power supply, UZP-600-A**-****-*.
 In addition, all items in this specification shall be provided at nominal temperature and humidity unless otherwise specified.

Model Name Coding

Example : UZ P - 600 - A 24 - J H 0 □ - K
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

- ① Series Name....."UZ": UZ series
- ② Peak power....."P": Corresponding to Peak power
- ③ Continuous output power....."600": 600W
- ④ Arrester....."A": With Arrester
- △ ⑤ Output voltage....."24": 24V, "30": 30V, "36": 36V, "48": 48V
- ⑥ Input / output connector type....."J": Nylon connector, "T": Block terminal
- ⑦ Connector direction....."H": Horizontal, "V": Vertical
- △ ⑧ Optional function....."0": Without, "F": FAN output "X": Lifetime notice
- ⑨ Modification....."Blank": Standard, "1-9" or "A-Z": Modification code
- ⑩ Cover....."K": With Cover, "Blank": Without Cover

General Specification


Items		Specification				Measurements conditions, etc.	
		Main output					
		24V	△ 30V	△ 36V	48V		
AC Input	Rated Voltage		100-240VAC				Worldwide range
	Voltage Range		85-264VAC				Load factor shall be 90-100% in range of 85-90VAC input Starting voltage: 80V AC ±10V
	Current	At 115VAC	5.8A typ.				At rated output (Natural air cooling)
			7.8A typ.				At rated output (Forced air cooling)
		At 230VAC	2.9A typ.				At rated output (Natural air cooling)
			3.9A typ.				At rated output (Forced air cooling)
	Rated Frequency		50/60 Hz				Frequency range 47-63Hz
	Inrush Current	At 100VAC	18A typ.				Power thermistor system At cold start (25°C)
		At 200VAC	36A typ.				
	Efficiency	At 115VAC	93% typ.				The main output is at rated load. The standby output is at no load. (The FAN output is at no load.) △
At 230VAC		95% typ.					
Power Factor	At 115VAC	98% typ.				At rated output (Natural air cooling)	
	At 230VAC	96% typ.					



Note:

A×6:2022.09.30 K.Nakagawa

Drawn by	Checked by	Approved by	Model:	Drawing No.
Yodo	Yamada	Yamamoto	UZP-600-A**-****-*	3626-01-4-520 A
				△ 1/13

Items		Specification				Measurements conditions, etc.
		Main output				
		24V	△ 30V	△ 36V	48V	
Environment	Operating Temp.	Natural Air Cooling	-20 to 70°C (Open frame)			Refer to "Output derating specification".
		Cooling	-20 to 60°C (With cover)			
		Forced Air Cooling	-20 to 70°C (Open frame)			Refer to "Output derating specification".
			-20 to 70°C (With cover)			
	Operating Humidity	20 to 90%RH				
	Storage Temp. / Humidity	-20 to 85°C / 10 to 95%RH			There shall no condensation	
Vibration	To endure the vibration acceleration of 2G with vibration frequency of 10 to 55Hz for 10 sweep cycles in each X, Y, Z direction.			Follow JIS-C-60068-2-6 At no operation		
Surface Dropping	Left one bottom edge of the unit 50mm high with the opposite edge placed on the test bench, and let it fall. Repeat 3 times for each of four bottom edges, and no malfunction shall be observed.			Follow JIS-C-60068-2-31 At no operation		
Insulation	Dielectric Strength	1.5kVAC/1min. between input and main output/standby output/RC/AC FAIL(/FAN output/PS LIFE) (*1) △			Cut-off current 10mA	
		1.5kVAC/1min. between input and FG			Cut-off current 10mA	
		500VAC/1min. between main output /standby output /RC/AC FAIL (/FAN output/PS LIFE)and FG. △			Cut-off current 100mA	
		500VAC/1min. between each main output and standby output(/FAN output/PS LIFE)/RC/AC FAIL △				
		100VAC/1min. between main output and standby output				
	Insulation Resistance	50MΩ min. between each input/output/RC/AC FAIL(/FAN output/PS LIFE)/FG △			At 500 VDC	
Leakage Current	0.06mA typ. (at100VAC), 0.12mA typ. (at200VAC)					
Others	Electrostatic discharge	IEC61000-4-2 test level 3 compliant (Contact discharge: ±6kV, 10 times)			Apply to FG and case. There shall be no malfunction, nor failure.	
	Fast transient burst	IEC61000-4-4 test level 3 compliant			There shall be no malfunction, nor failure.	
	Impulse voltage immunity	IEC-61000-4-5 (Installation environment 4 min.) compliant; apply 5 times each of Common mode ±4kV and Normal mode ±2kV			There shall be no malfunction, nor failure. With arrester.	
	Conducted emission	VCCI/FCC/CISPR32/EN55032 Class B compliant			At rated Input and output (Natural air cooling)	
	Harmonic current regulations	IEC61000-3-2 (edition 2.1) class D, EN61000-3-2 (A14) class D compliant.			At rated input and continuous rating output	
	Safety Standard	UL62368 (c-UL) certified *2 24V & 48V: UL62368 (c-UL) certified, 30V & 36V: UL62368 (c-UL) compliant △				
		CE marking adapted *2 Only 24V & 48V adapt to CE marking. △ PSE (Ordinance item 2) compliant				
Cooling system	Natural air cooling					

Note:
 *1 The dielectric strength between input and main output/standby output/RC/AC_FAIL(/FAN output/PS LIFE) is 3k VAC/1 min., but please refer to the above specifications because an arrester is installed between input and FG. △
 *2 The cover type and the optional function type complies with UL62368 and CE marking. △

A×11:2022.09.30 K.Nakagawa

Drawn by	Checked by	Approved by	Model:	Drawing No.
Yodo	Yamada	Yamamoto	UZP-600-A**_****_*	3626-01-4-520A
				△ 2/13

Items	Specification				Measurements conditions, etc.
	Main output				
	24V	30V	36V	48V	
Others Dimensions and Weight	127×44×228.6 (W×H×D) / 1300g typ.				The optional function type weights 1320g typ. △
	127×52×233.6 (W×H×D) / 1450g typ. △				With cover The optional function type weights 1470g typ. △
Warranty	Three years after delivery: if any defects belong to us, the defective unit shall be repaired or replaced at our cost.				Except for errors caused by operation not specified in this specification.

Note:



A×4:2022.09.30 K.Nakagawa

Drawn by	Checked by	Approved by	Model:	Drawing No.
Yodo	Yamada	Yamamoto	UZP-600-A**_****_*	3626-01-4-520A

Output Specification								
Items		Specification					Measurements conditions, etc.	
		Main output				Stand-by output		
		24V	△ 30V	△ 36V	48V	12VSB *2		
Output Rating	Rated Voltage		24V	30V	36V	48V	12V	At rated input Refer to "Output derating specification"
	Continuous rating 1 (natural air cooling)	Current	25A	20A	16.7A	12.5A	0.42A	
		Power	600W	600W	601.2W	600W	5W	
	Continuous rating 2 (forced air cooling)	Current	33.4A	26.7A	22.3A	16.7A	0.42A	
		Power	801.6W	801W	802.8W	801.6W	5W	
Peak rating (5 seconds or less)	Current	50A	40A	33.4A	25A	0.42A	Refer to "Peak output specification" Natural air cooling and forced air cooling.	
	Power	1200W	1200W	1202.4W	1200W	5W		
Output Characteristics	Factory setting		24V ±2%	30V ±2%	36V ±2%	48V ±2%	12V±5%	At continuous rating output 1
	Adjustable voltage range		24V -2%,+10%	30V -5%,+10%	36V -5%,+10%	48V -2%,+10%	Fixed	
	Static input regulation		94mV max.	120mV max.	144mV max.	192mV max.	47mV max.	
	Static load regulation	Rated load	150mV max.	180mV max.	220mV max.	300mV max.	75mV max.	
		Peak load	250mV max.	300mV max.	370mV max.	500mV max.		
	Temperature regulation	0 to 70°C	0.02%/°C max.					
		-20 to 0°C	0.04%/°C max.					
	Ripple voltage	0 to 70°C	130mVp-p max.	160mVp-p max.	195mVp-p max.	260mVp-p max.	120mVp-p max.	Connect 150mm max. lead wire to output connectors, and then connect a 10μF electrolytic capacitor with a 0.1μF ceramic capacitor in parallel to the other ends of the wires to measure by an oscilloscope with 100MHz frequency band. (*3)
		-20 to 0°C	175mVp-p max.	300mVp-p max.	320mVp-p max.	350mVp-p max.	160mVp-p max.	
	Spike voltage	0 to 70°C	150mVp-p max.	190mVp-p max.	225mVp-p max.	300mVp-p max.	150mVp-p max.	
-20 to 0°C		200mVp-p max.	350mVp-p max.	375mVp-p max.	400mVp-p max.	180mVp-p max.		
Protection Circuit	Over current protection	OCP point	101% min. of peak rated current				0.44Amin.	
		Method	Blocking oscillation				Blocking oscillation	
		Recovery	Automatic recovery				Automatic recovery	
	Over voltage protection	OVP point	28.0 -33.0V	34.5 -40.5V	43.2 -49.4V	56.2 -63.0V	—	
Method		Output shutdown (latch lock)				—		
Recovery		Reclosing of AC input				—		

Note:


*2 Standby output is interlocked with AC input.

*3 The ripple and spike voltage at 200W or less output shall be 400mV/500mV max.




A×3:2022.09.30 K.Nakagawa

Drawn by	Checked by	Approved by	Model:	Drawing No.
Yodo	Yamada	Yamamoto	UZP-600-A**-****-*	3626-01-4-520 A
				△ 4/13

Signal Input/Output specification																
Items	Specification	Signal circuit diagram														
Input signal	<p>Output ON/OFF control signal (RC signal)</p> <table border="1"> <caption>Operating mode</caption> <tr> <td>Between +RC and -RC</td> <td>CH1 output</td> </tr> <tr> <td>SW ON(4.5V min.)</td> <td>ON</td> </tr> <tr> <td>SW OFF(0.8V max.)</td> <td>OFF</td> </tr> </table> <p><u>External power supply and Load-limiting resistor</u></p> <table border="1"> <tr> <td>External power supply:E</td> <td>Load-limiting resistor : R</td> </tr> <tr> <td>4.5 to 12.5Vdc</td> <td>Not required</td> </tr> <tr> <td>12.5 to 30Vdc</td> <td>1.5kΩ</td> </tr> <tr> <td>30 to 48Vdc</td> <td>8.2kΩ</td> </tr> </table> <p><u>Shorting Plug</u> With shorting plug (CN2) connected, output starts up when AC input is applied regardless of RC signal. To control Start/Stop of output by RC signal, uncap shorting plug of CN2.</p> <p>Note: Shorting plug (CN2) is primary circuit components. Make sure to operate the plug after the AC input is turned off.</p>	Between +RC and -RC	CH1 output	SW ON(4.5V min.)	ON	SW OFF(0.8V max.)	OFF	External power supply:E	Load-limiting resistor : R	4.5 to 12.5Vdc	Not required	12.5 to 30Vdc	1.5kΩ	30 to 48Vdc	8.2kΩ	<p><u>Connection example: using external power supply</u></p> <p><u>Connection example: using standby output</u></p> <p>※Output start-up with SW on</p>
	Between +RC and -RC	CH1 output														
SW ON(4.5V min.)	ON															
SW OFF(0.8V max.)	OFF															
External power supply:E	Load-limiting resistor : R															
4.5 to 12.5Vdc	Not required															
12.5 to 30Vdc	1.5kΩ															
30 to 48Vdc	8.2kΩ															
Remote Sensing signal (RS signal)	<p>Input terminal for detection of output voltage. Connecting RS signal to positive side of devices, it shall compensate line-drop at positive side such as output cable.</p>															
Output signal	<p>Blackout detection signal (AC_FAIL)</p> <p>The signal goes "OPEN" at low AC input voltage and power failure detection. Detection voltage: 80 V AC typ. Detection delay time: 20 to 50ms after AC input failure.</p>	<p><u>Circuit</u></p>														
<p>Note:</p> <div style="text-align: right;">  23.6.22 エプロン 技術管理 </div> <p style="text-align: right;">Δ×1:2022.09.30 K.Nakagawa</p>																

Drawn by	Checked by	Approved by	Model:	Drawing No.
Yodo	Yamada	Yamamoto	UZP-600-A**-****-*	3626-01-4-520
				Δ 5 / 13


Other output specification			
Items	Specification	Signal circuit diagram	
Other output	FAN output (UZP-600-A**-**F only)	An external RVFAN can be driver while the main inverter circuit is running. Output is stopped while the main inverter circuit is stopped due to circuit failure ,AC input power failure or “output ON/OFF control signal “ OFF operation.	Maximum current 0.3A. The output voltage $10 \pm 2V$.
	Lifetime notification signal (PS_LIFE signal) (UZP-600-A**-**X only)	“OPEN” is output when the estimated remaining life of the electrolytic capacitor decreases to 20% or when the total operating time (excluding no-energized time) reaches 15 years. The LED will also light up red.	Circuit 
<p>Note:</p> <p>※1 This function does not guarantee product life, but rather serves as a signal to notify when it is time to replace the product. Regardless of whether the signal output is present or not, the product should be replaced within a maximum of 15 years after purchase.</p> <p>After the AC input is turned on, the lifetime notification signal outputs “OPEN” for about 0.1 second after the standby output (12VSB) voltage rises, and the LED lights up red.]</p> <p>This is to confirm that the lifetime notification function is working properly and is not intended to provide an indication of when to replace the product.</p>			



△×1:2022.09.30 K.Nakagawa

Drawn by	Checked by	Approved by	Model:	Drawing No.
Yodo	Yamada	Yamamoto	UZP-600-A**-****-*	3626-01-4-520

●Sequence Timing diagram (Without Capacitor Package) ⚠

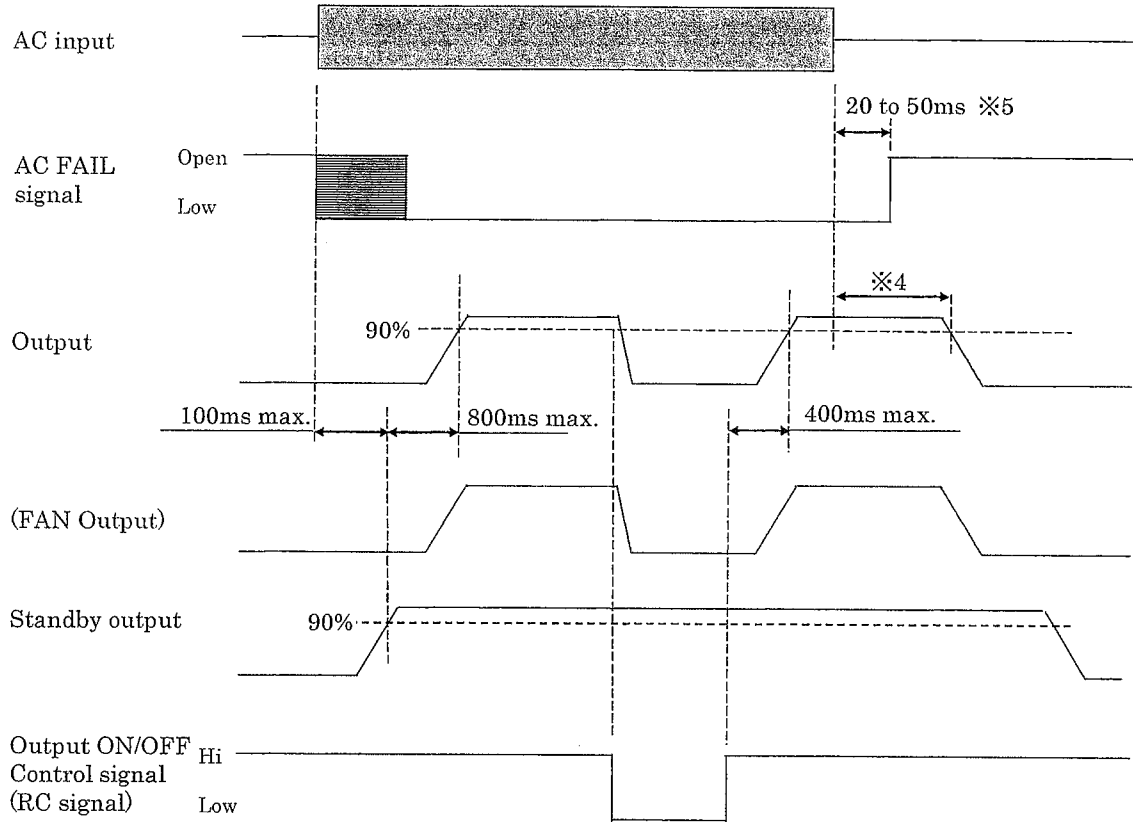


Undefined area

*4 : Refer to the graph below for the retention time.

*5 : When output power is under 10% and input voltage is higher than 150VAC, It shall be 150ms max.

*4. Retention time(Representative value)

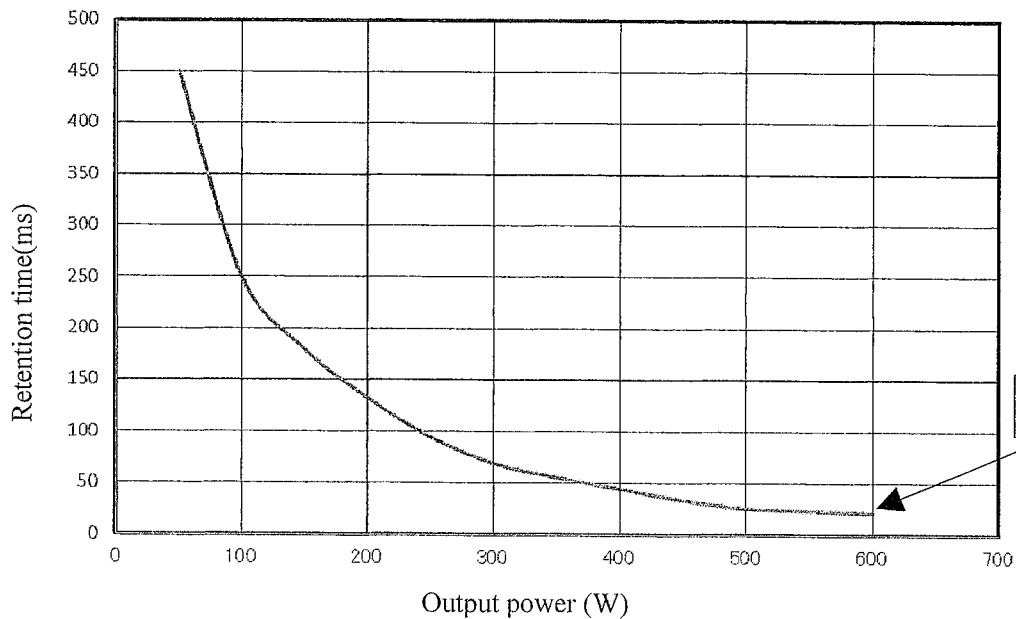

20ms typ.

出図
23.6.22
(株)ニプロン
技術管理

A*2:2022.09.30 K.Nakagawa

Drawn by	Checked by	Approved by	Model:	Drawing No.
Yodo	Yamada	Yamamoto	UZP-600-A**-****-*	3626-01-4-520A


●Peak output specification

Peak output current shall meet the conditions below.

- Duty ratio of peak current shall be 30% or less
- Energized period of peak current shall be 5 seconds or less.
- The value resulting from the formula below shall not exceed the continuous rated current, I_o, after derating specified in “Output derating” item.


$$\sqrt{((I_p^2 \times D) + (I_m^2 \times (1 - D)))} \leq I_o$$

I_p = Peak current value
 I_m = Min. current value
 D = Duty ratio, t/T
 t = Pulse width of peak current
 T = Cycle
 I_o = Continuous rated current specified in “Output derating” item

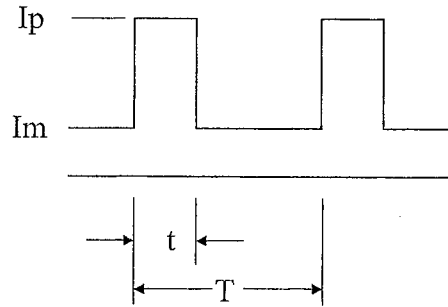


●Peak output derating for output voltage


Reduce the peak power according to the derating diagram below according to the output voltage setting value.

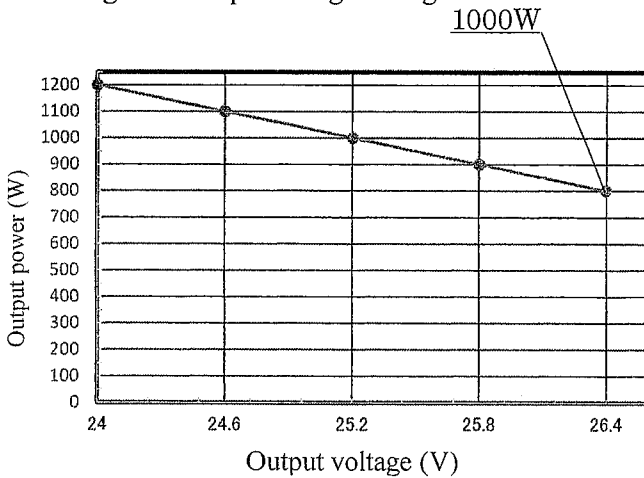


△ 24V output type

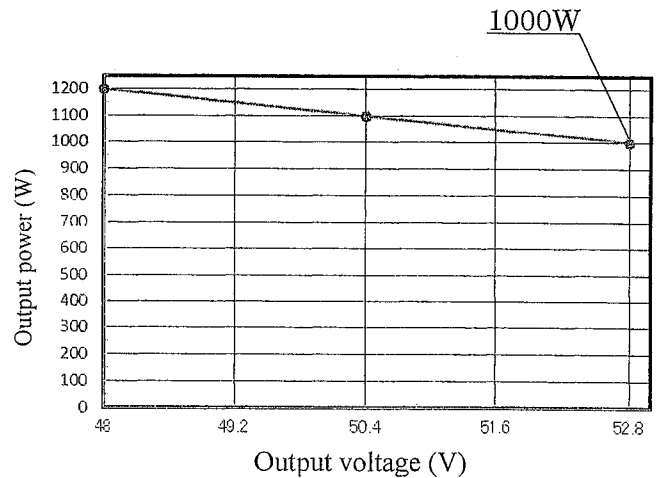

48V output type

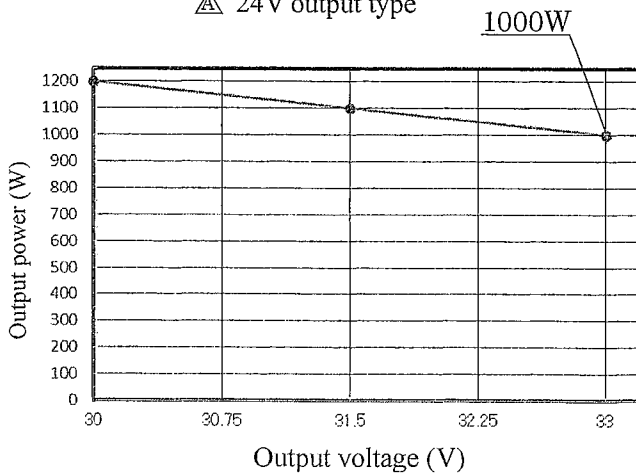


△ 30V output type

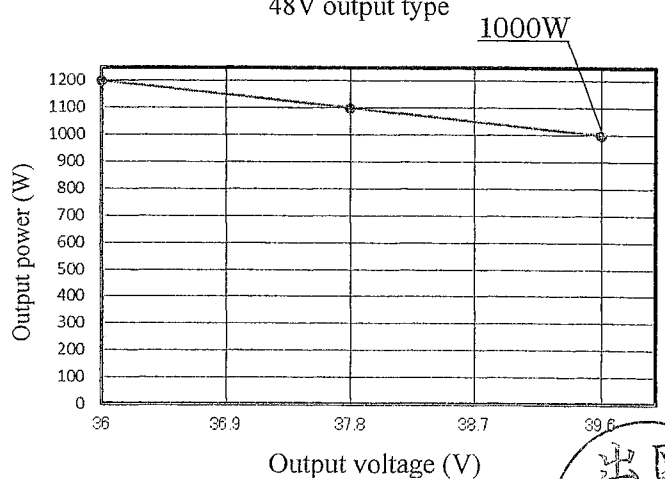

△ 36V output type




A×4:2022.09.30 Nakagawa



Drawn by	Checked by	Approved by	Model:	Drawing No.
Yodo	Yamada	Yamamoto	UZP-600-A**_****_*	3626-01-4-520A
				△ 8/13

●Output derating based on ambient temperature, installation direction and cooling condition

The following figure shows the required output derating diagram with the mounting holes (4 locations) on the bottom of the power supply installed on a 1.6mm thick steel plate.
 Reduce the output power according to the derating diagram below according to the ambient temperature of the power supply.
 Also, forced air cooling condition in the diagram shall be provided that the air flow of 2m/s passes through the CN1 as shown below.

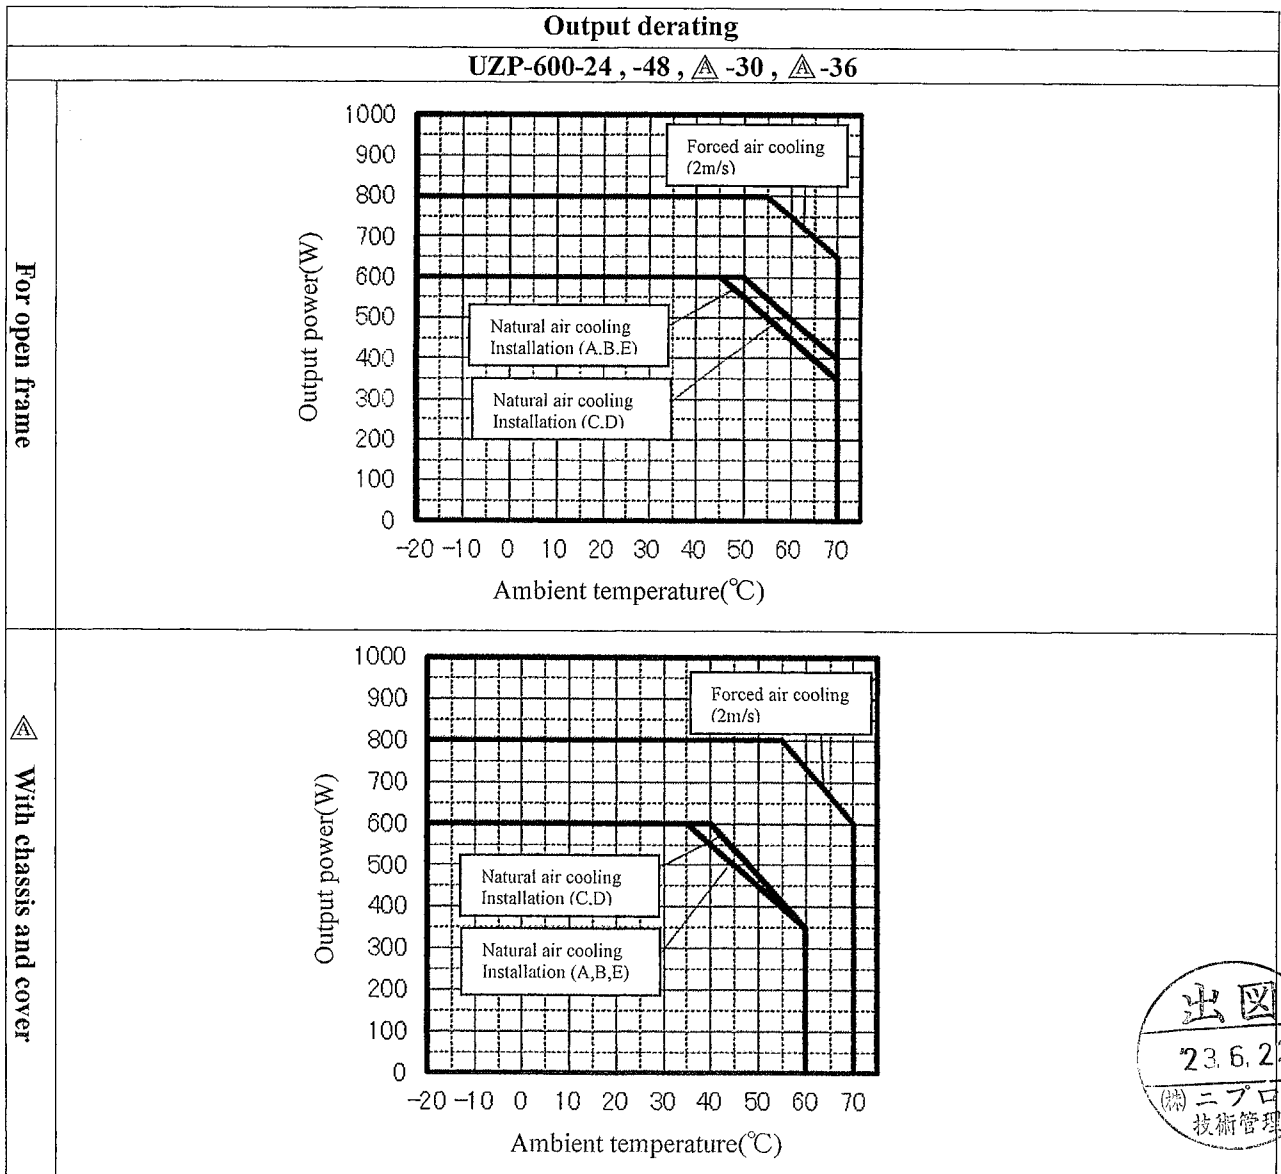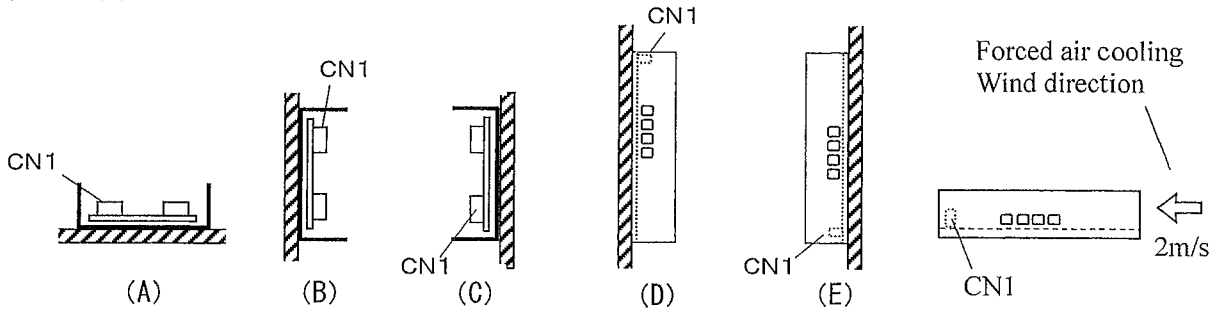


A×4:2022.09.30 K.Nakagawa

Drawn by	Checked by	Approved by	Model:	Drawing No.
Yodo	Yamada	Yamamoto	UZP-600-A**_****_*	3626-01-4-520A

●Output derating vs. Input voltage

When input voltage is 90VAC or lower, follow the derating diagram below to reduce the continuous rated current and power.

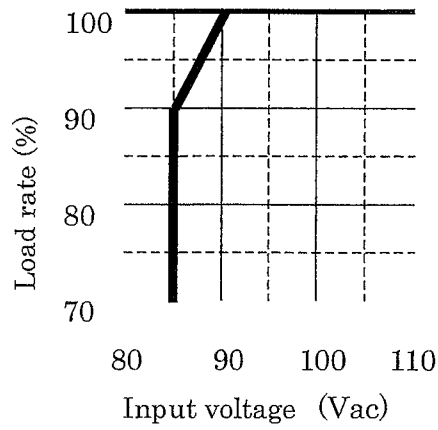

Note:




△×1:2022.09.30 K.Nakagawa

Drawn by	Checked by	Approved by	Model:	Drawing No.
Yodo	Yamada	Yamamoto	UZP-600-A**-*****-*	3626-01-4-520
				△10/13

●Circuit block diagram

※1 [] UZP-600-A**-**X only
 ※2 [] UZP-600-A**-**F only

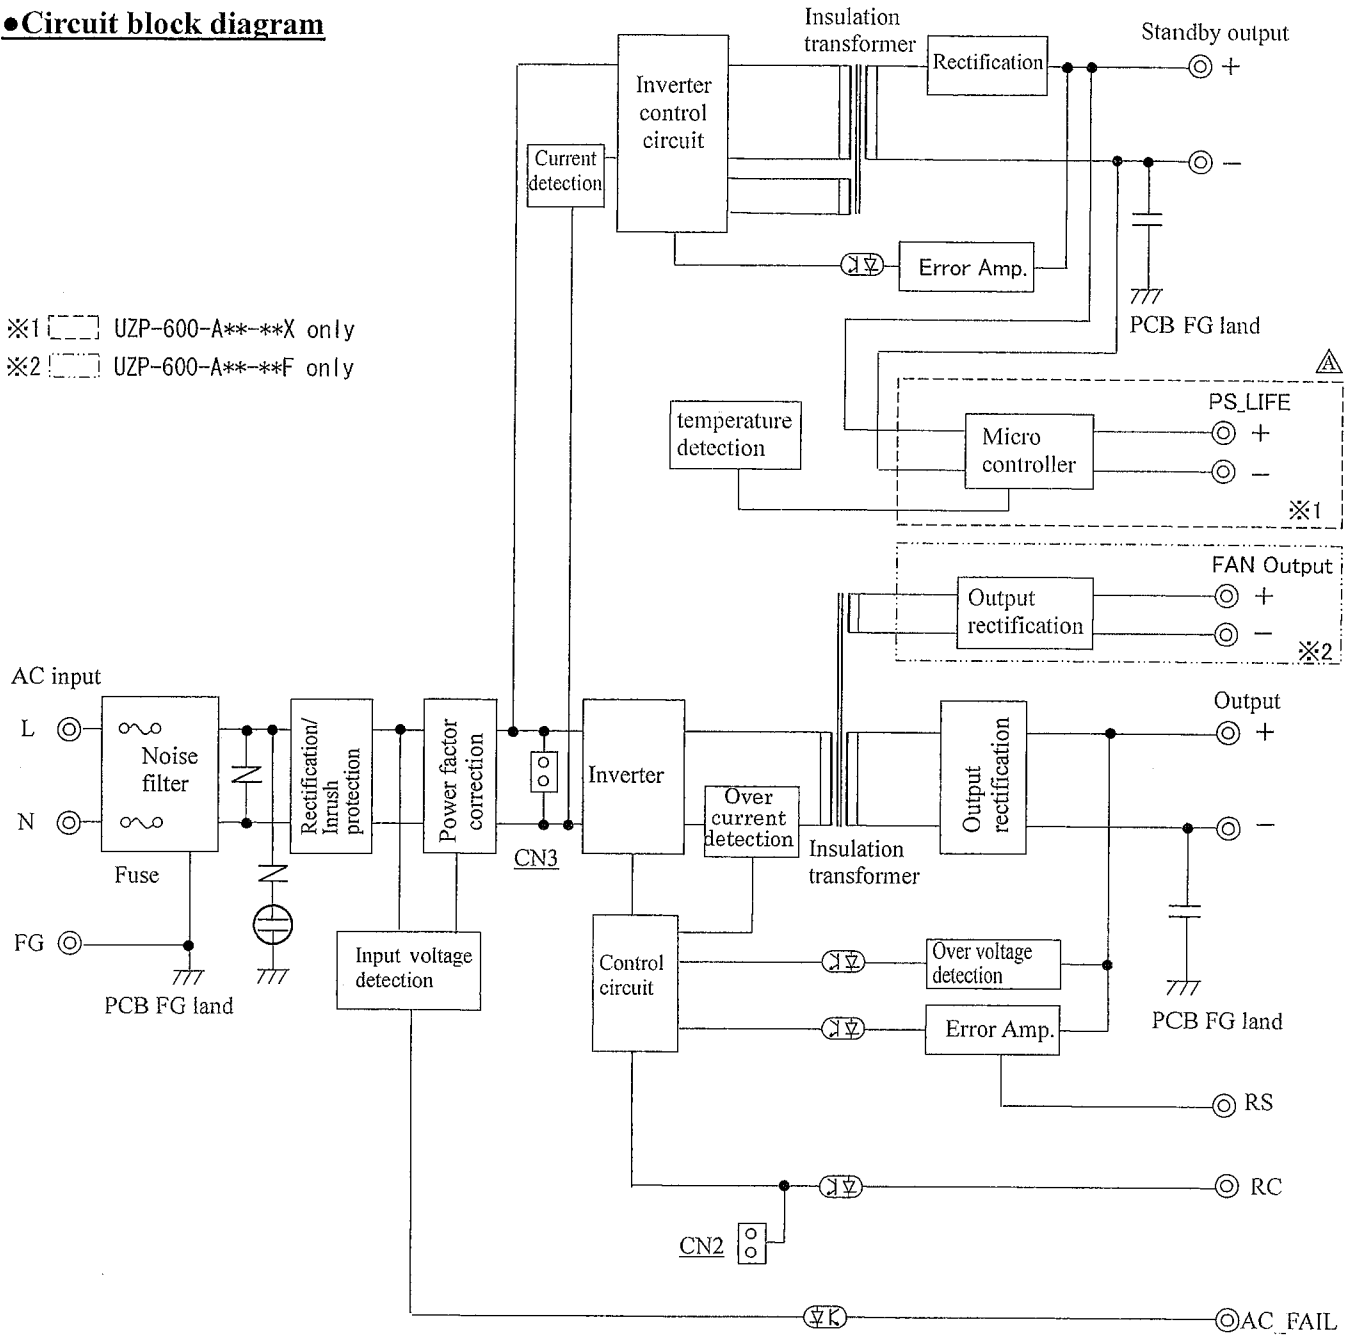

Note:




A×2:2022.09.30 K.Nakagawa

Drawn by	Checked by	Approved by	Model:	Drawing No.
Yodo	Yamada	Yamamoto	UZP-600-A**-**_*	3626-01-4-520 A

●Power supply installation and mounting screws

- To meet the standard of insulation and dielectric withstanding, install the power supply to keep the dimensions, d1, and d2, shown in the drawings below.
- Install the power supply so that natural air convection and air ventilation are expected to keep the temperature rise around the power supply low.

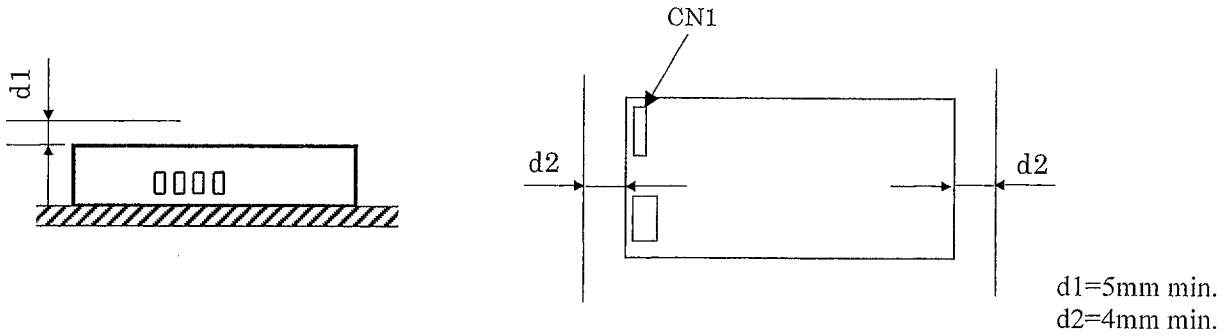

- In terms of mounting dimensions and screws for power supply, please refer to the outline drawings.










Note

△×1:2022.09.30 K.Nakagawa


Drawn by	Checked by	Approved by	Model:	Drawing No.
Yodo	Yamada	Yamamoto	UZP-600-A**_****_*	3626-01-4-520
				△ 12 / 13


●Precautions before use

1. Grounding  Warning
This unit is designed and produced to meet Class 1 equipment. Make sure to connect the grounding terminal of the unit to grounding in a proper way for safety.
2. Electric shock  Warning
This unit is designed and produced as built-in equipment and has high-voltage part inside. Make sure to securely install in the equipment in a proper way to prevent electric shock. Also, shorting plug (CN2) for RC signal setting is primary circuit components. When the plug is handled, make sure to turn off AC input before the handling of the plug.
3. Handling of product  Caution 
In handling, hold the metal chassis part so as not to touch the component sides.
4. Output short circuit  Caution
Prevent shorting outputs.
When output is shorted, capacitors inside the power supply rapidly discharge leading to fire and/or spark resulting in serious accident. It also shortens the lifetime of the power supply.
5. Inrush current control circuit  Caution
To prevent inrush current into rectifying capacitors when AC input is turned on, a power thermistor is used. When AC input is turned on before the temperature of the thermistor goes low after turning off, huge inrush current may occur. Make sure to keep 60-second period at least before reclosing of AC input.
6. Output energy  Caution
The output energy of this unit is 240VA or more and regarded as dangerous.
Any operators must not touch the unit. Besides, apply necessary measures to prevent service personnel or service tools to touch accidentally the equipment with this unit installed. Make sure that the input/output voltage of this unit goes down to the safe level before servicing after the input voltage is turned off.



A×2:2022.09.30 K.Nakagawa

Drawn by	Checked by	Approved by	Model:	Drawing No.
Yodo	Yamada	Yamamoto	UZP-600-A**_****_*	3626-01-4-520 A
				 13 / 13

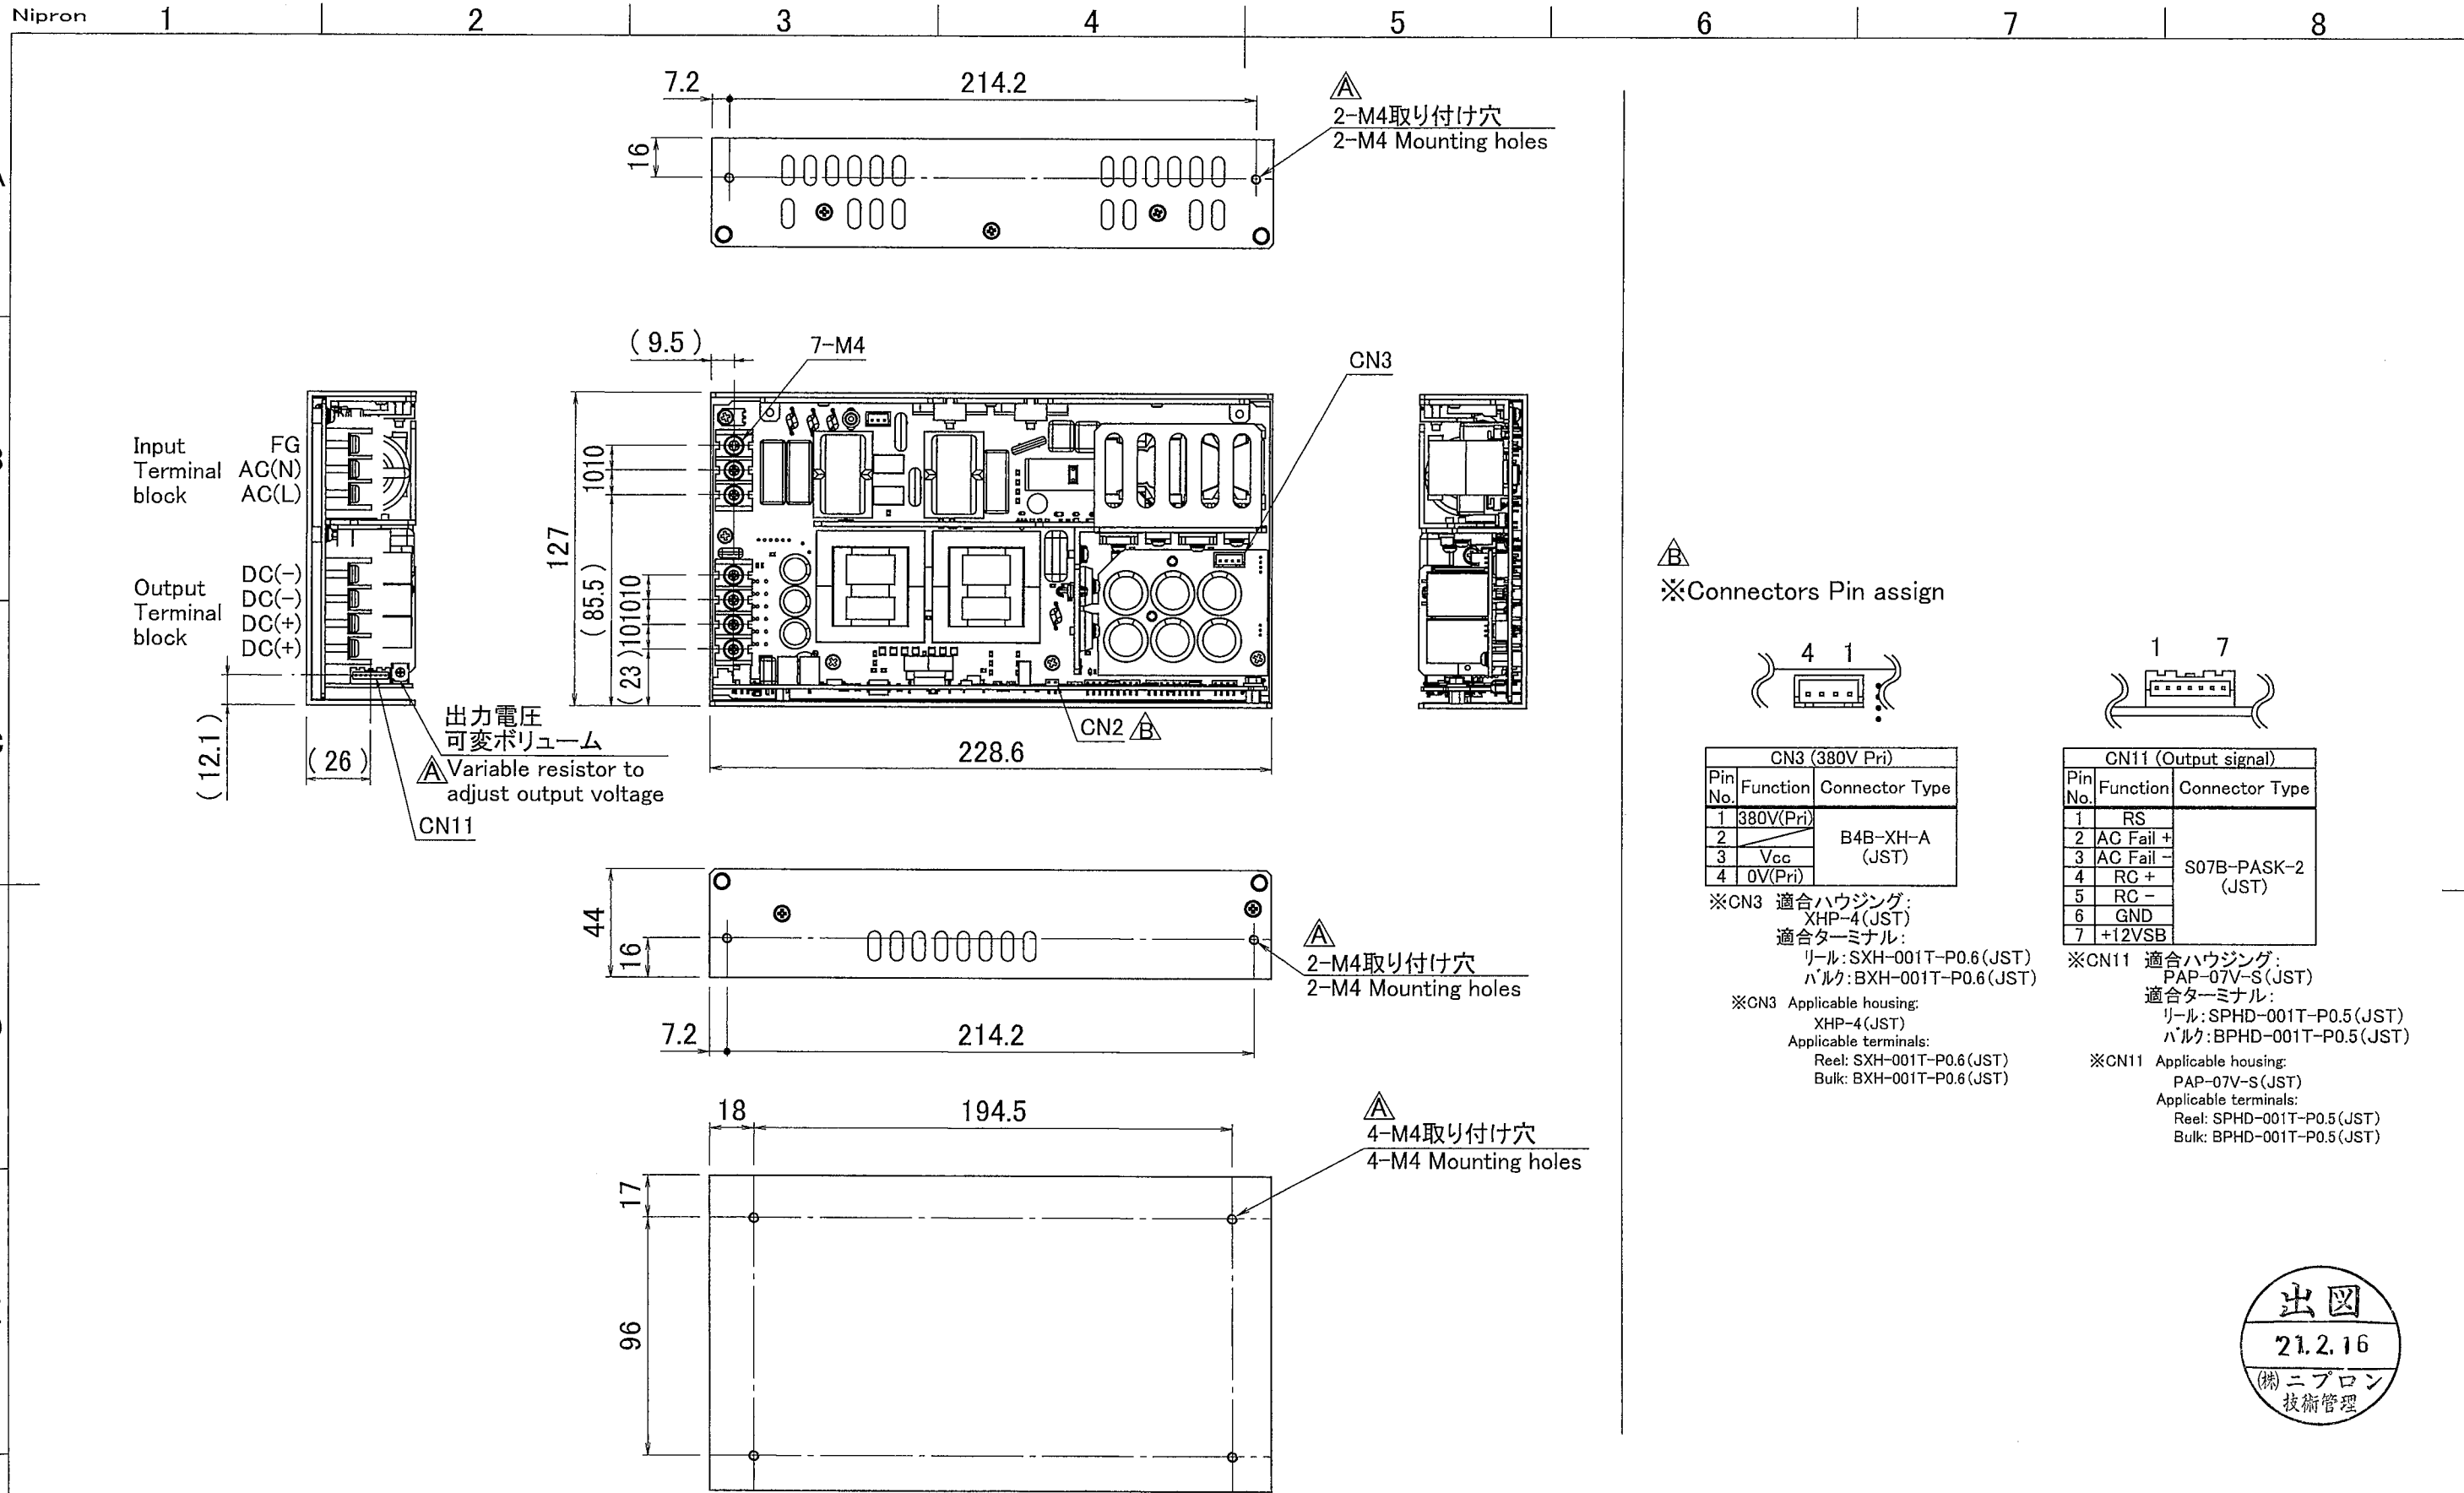

注1: 指示なき寸法公差は ±1mm とする
 注2: 取り付けビスの電源内部長さは 4mm MAX.
 注3: 取付部の寸法公差は ±0.5mm とする
 Note 1: Design tolerance of dimensions is ±1mm.
 Note 2: The screw depth of penetration into power supply is 4mm MAX.
 Note 3: Design tolerance of mounting dimensions is ± 0.5mm.

B版 2021.02.03 奥平(麻) I-321113(CN2追記, ピンアサイン追記)
 A版 2019.12.06 奥平(麻) I-311145(英文追記)

DRAWN BY	CHECKED BY	CHECKED BY	APPROVED BY	SCALE	MATERIALS	TITLE
黒田	奥平	山田	山本	UNITS m/m	FINISH	
ISSUED	2019.07.09			3RD ANGLE PROJECTION		DRAWING NO. 3626-07-3-050 B