

Model	GPSA-600-48	
Item	Ambient Temperature Drift	

### 1. Test Conditions (試験条件)

Input Voltage: 100V AC

(入力電圧: AC 100V)

Load Factor: 40%, 60%, 80%, 100%


(負荷率: 40%, 60%, 80%, 100%)

Ambient temperature measuring point: Measured point, Shall be 10cm away from the power supply inlet(Except top side)

(周囲温度測定ポイント:電源のファン吸気口から、上方以外に10cm離れた地点)

### 2. Test Results (試験結果)

Load Factor [%]	Load Power [W]	Estimated Life Time [H] (推定寿命時間)			
		30°C	40°C	50°C	60°C
40.0	242.4	475,048	237,524	118,762	59,381
60.0	363.6	434,113	217,057	108,528	54,264
80.0	484.8	383,193	191,597	95,798	47,899
100.0	606.0	315,594	157,797	78,899	-

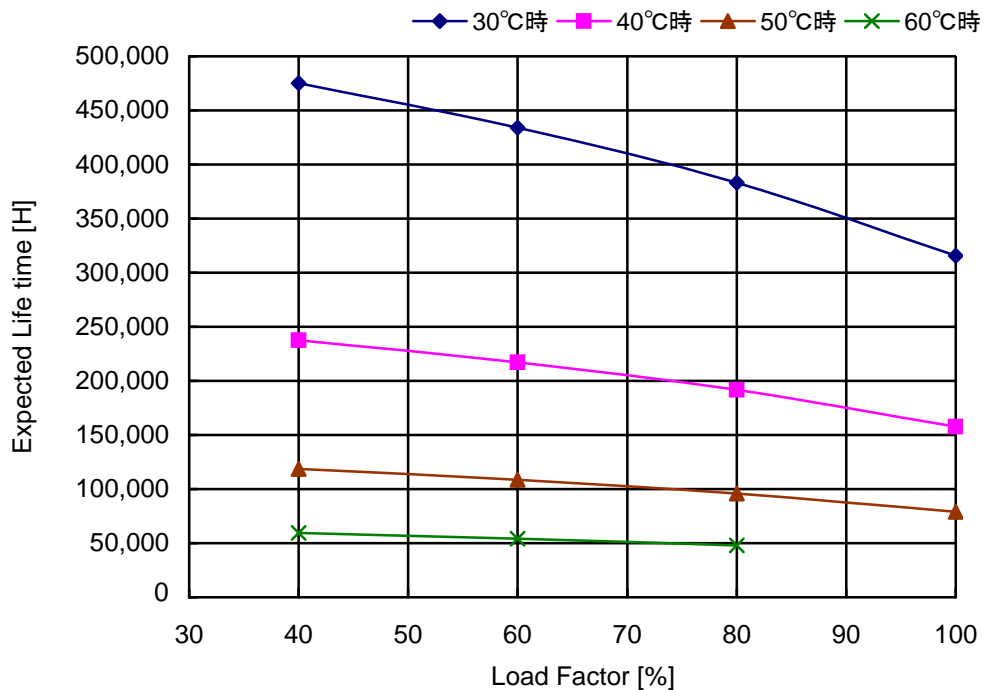

Over the area of 15 years, the degradation of sealing rubber, etc., is not included in the calculation  
(15年以上では、封口ゴムの劣化の影響は、計算式には含まれていません)