

# AC power cable WH2753 (PS2753)



RoHS Directive


Model*	Stock	Standard price (Before Tax)
WH2753 (PS2753)	Standard stock	¥1,100

\* Model in () is old name.

### Features

- RoHS directive compliant cable
- PSE compliant (AC 125V / 12A)
- Fully mating to AC power cable coming-off prevention bracket ACC2734

### Dimension



### Product specification

Items	Specification
Rating	AC 125V, 12A
Dielectric strength	To endure for one minute AC 1250 between lines
Safety standard	PSE

# RS232C cable WH2601 (PS2601) series



RoHS Directive


Model*	Stock	Standard price (Before Tax)
WH2601-01 (PS2601-01)	Standard stock	¥860
WH2601-02 (PS2601-02)	Standard stock	¥860

\* Model in () is old name.

### Features

- Serial communication cable
- To be used for shutdown communication between power supply and PC <WH2601-01> ● Corresponding OS: Windows 95/98/NT <WH2601-02> ● Corresponding OS: Windows 2000/XP/Vista

### Dimension



### Pinout assignment

CONNECTOR	WIRING			CABLE TYPE
	CONNECTION	MAX CURRENT	FUNCTION	
D-SUB9 (Female) Hood: Mold Ivory	1-1	0.1A	BATT LOW	UL2464 26AWG Double Sealed (Color: Ivory)
	4-4	0.1A	SHUT DOWN	
	8-8	0.1A	AC FAIL	
	Shell-Shell	-	Drain	
D-SUB9 (Female) Hood: Mold Black	1-1	0.1A	BATT LOW	UL2464 26AWG Double Sealed (Color: Black)
	8-8	0.1A	AC FAIL	
	Shell-Shell	-	Drain	

### Product specification

Items	Specification	Measurement condition	
Environment	Operating Temp.	0 to 70°C	Temperature gradient 15°C/H
	Storage Temp.	-25 to 70°C	
	Relative humidity	10 to 95%	
Warranty	One year after delivery. However, if any faults belong to us, the defective unit shall be repaired or replaced at our cost.	Provided that the unit shall be operated under normal temp. and humidity, and rating.	
Other	Mounting screw	No.4-40UNC (inch)	

# USB cable WH2967



RoHS Directive

※ Image

Model	Stock	Standard price (Before Tax)
WH2967	Standard stock	¥760


### Features

- USB communication cable
- To be used for shutdown communication between power supply and PC

### Applicable power supply

Desktop PC power supply			
Model	Page	Model	Page
eNSP3-450P-S20-H6V	B-C2	eNSP-300P-S20-16S	B-C22
eNSP4-500P-SA0-H6V	B-C12		

### Dimension

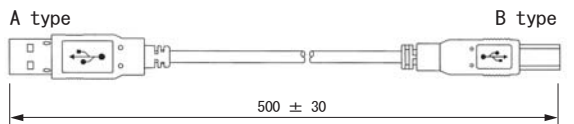

### Product specification

Items	Specification	Measurement condition	
Environment	Operating Temp.	0 to 70°C	Temperature gradient 15°C/H
	Storage Temp.	-25 to 70°C	
	Relative humidity	10 to 95%	
Warranty	One year after delivery. However, if any faults belong to us, the defective unit shall be repaired or replaced at our cost.	Provided that the unit shall be operated under normal temp. and humidity, and rating.	