



# Removable output harness WH-M2424-500

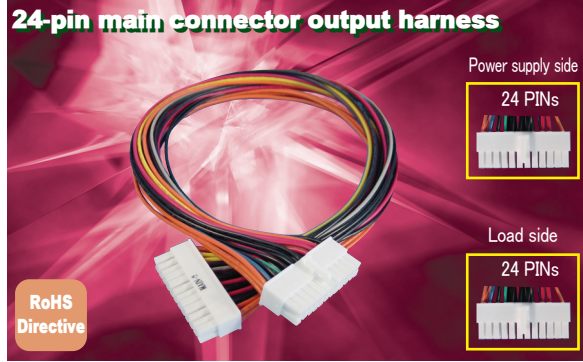

## Dimension

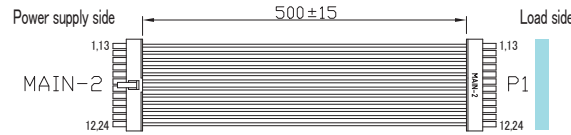

## Product specification

Items	Specification	Measurement condition
Operating Temp.	-10 to 70°C	Temperature gradient 15°C/H
Storage Temp.	-25 to 70°C	Temperature gradient 15°C/H
Relative humidity	10 to 95%	No condensation
Warranty	One year after delivery. However, if any faults belong to us, the defective unit shall be repaired or replaced at our cost.	Provided that the unit shall be operated under normal temp., humidity and specification.

Model	Stock	Standard Price (Before Tax)
WH-M2424-500	Standard stock	¥720

Model name coding  
 WH - M 24 24 - 500  
 ① ② ③ ④ ⑤

① Wire harness  
 ② Main harness  
 ③ 24 pins for load side  
 ④ 24 pins for power supply side  
 ⑤ Harness length (mm)


## Applicable power supply

Desktop PC power supply		System rack power supply	
Model	Page	Model	Page
eNSP3-450P series	B-C2	pNSP2U-550P-AAS	B-F54
eNSP4-500P series	B-C12	pNSP2U-330P-AAS	B-F64
ePCSA-650P-E2S	B-E2		
ePCSA-600P-E2S	B-E12		
ePCSA-500P-X2S	B-E22		
PCSF-350P-X2S	B-E96		


## Pinout assignment

CONNECTOR TYPE	PIN No.	PIN No.	MAX CURRENT	FUNCTION	WIRE COLOR	WIRE TYPE	CONNECTOR TYPE
MAIN-2	13	1	4.8A	+3.3V	ORANGE	UL1007 AWG#18	Housing: CP-01124030(CvILux) or equivalent Terminal: 13PIN CP-01100105(CvILux) or equivalent Other CP-01100102(CvILux) or equivalent
	2	2	4.8A	+3.3V	ORANGE		
	3	3	4.8A	COM	BLACK		
	4	4	4.8A	+5V	RED		
	5	5	4.8A	COM	BLACK		
	6	6	4.8A	+5V	RED		
	7	7	4.8A	COM	BLACK		
	8	8	4.8A	PWR OK	GRAY		
	9	9	4.8A	+5VSB	VIOLET		
	10	10	4.8A	+12V	YELLOW		
	11	11	4.8A	+12V	YELLOW		
	12	12	4.8A	+3.3V	ORANGE		
	1	13	4.8A	+3.3V SENSE	ORANGE	UL1007 AWG#18	
	13	13	4.8A	+3.3V	ORANGE		
	14	14	4.8A	-12V	BLUE		
	15	15	4.8A	COM	BLACK		
	16	16	4.8A	PS ON#	GREEN		
	17	17	4.8A	COM	BLACK		
	18	18	4.8A	COM	BLACK		
	19	19	4.8A	COM	BLACK		
20	20		N.C.				
21	21	4.8A	+5V	RED	UL1007 AWG#18		
22	22	4.8A	+5V	RED			
23	23	4.8A	+5V	RED			
24	24	4.8A	COM	BLACK			

# Removable output harness WH6113-12

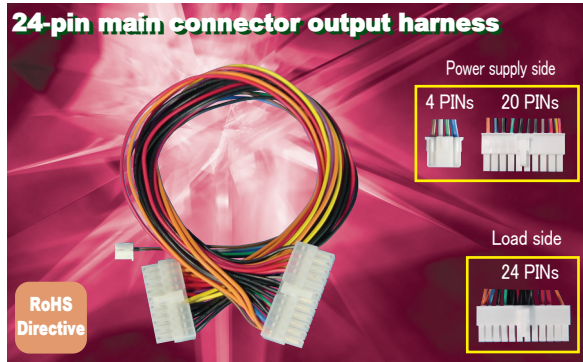

## Dimension

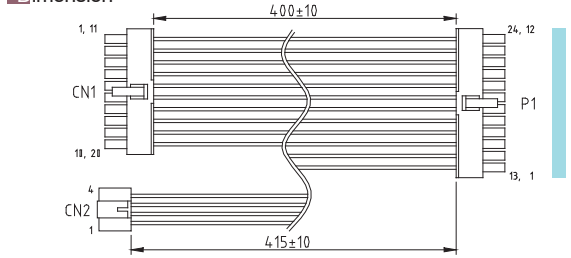

## Product specification

Items	Specification	Measurement condition
Operating Temp.	-10 to 70°C	Temperature gradient 15°C/H
Storage Temp.	-25 to 70°C	Temperature gradient 15°C/H
Relative humidity	10 to 95%	No condensation
Warranty	One year after delivery. However, if any faults belong to us, the defective unit shall be repaired or replaced at our cost.	Provided that the unit shall be operated under normal temp., and humidity and rating.

Model	Stock	Standard Price (Before Tax)
WH6113-12	Standard stock	¥720

## Applicable power supply

System rack power supply			
Model	Page	Model	Page
PC1U-300P-E2S	B-E206	PC1U-400P-E2S	B-E196

## Pinout assignment

CONNECTOR TYPE	CN	PIN No.	PIN No.	MAX CURRENT	FUNCTION	WIRE COLOR	WIRE TYPE	CONNECTOR TYPE
MAIN	CN1	1	1	6A	+3.3V	ORANGE	UL1007 AWG#18	Housing: CP-01120030(CvILux) or equivalent Terminal: CP-01100102(CvILux) or equivalent CN2 CN1 CN2 CN1 CN2 CN1 CN2 CN1 CN2 CN1
		2	2	6A	+3.3V	ORANGE		
		17	3	6A	COM	BLACK		
		13	4	6A	+5V	RED		
		18	5	6A	COM	BLACK		
		14	6	6A	+5V	RED		
		19	7	6A	COM	BLACK		
		3	8	10mA	PWR OK	GRAY		
		5	9	6A	+5VSB	VIOLET		
		6	10	6A	+12V	YELLOW		
	16	11	6A	+12V	YELLOW			
	11	12	6A	+3.3V	ORANGE			
	12	13	6A	+3.3V	ORANGE			
	4	13	10mA	+3.3V SENSE	BROWN	UL1007 AWG#22		
	1	14	0.5A	-12V	BLUE			
	7	15	6A	COM	BLACK			
	2	16	10mA	PS ON#	GREEN			
	8	17	6A	COM	BLACK			
	9	18	6A	COM	BLACK			
	10	19	6A	COM	BLACK			
15	20		N.C.					
15	21	6A	+5V	RED	UL1007 AWG#18			
4	22	6A	+5V	RED				
3	23	6A	+5V	RED				
20	24	6A	COM	BLACK				