


# Removable output harness WH-VG208-500



## Dimension

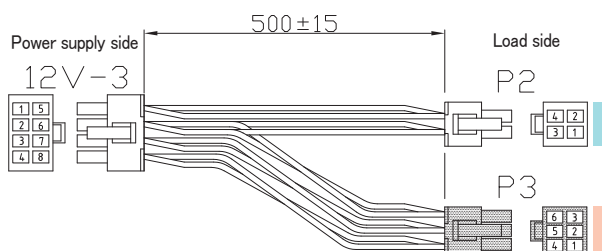

## Product specification

Items	Specification	Measurement condition
Environment	Operating Temp.	-10 to 70°C
	Storage Temp.	-25 to 70°C
	Relative humidity	10 to 95%
Other	Warranty	One year after delivery. However, if any faults belong to us, the defective unit shall be repaired or replaced at our cost.

Model	Stock	Standard Price (Before Tax)
WH-VG208-500	Standard stock	¥400

■ Model name coding

**WH - VG 2 08 - 500**

① Wire harness ② for 12V & Graphincs ③ Two connectors for load side  
④ 8 pins for power supply side ⑤ Harness length (mm)


## Applicable power supply

Desktop PC power supply		System rack power supply	
Model	Page	Model	Page
eNSP3-450P series	B-C2	PC1U-300P-E2S	B-E206
eNSP4-500P series	B-C12	PC1U-400P-E2S	B-E196
ePCSA-650P-E2S	B-E2	pNSP2U-550P-AAS	B-F54
ePCSA-600P-E2S	B-E12	pNSP2U-330P-AAS	B-F64
ePCSA-500P-X2S	B-E22		
PCSF-350P-X2S	B-E96		


## Pinout assignment

CONNECTOR TYPE	PIN No.	PIN No.	MAX CURRENT	FUNCTION	WIRE COLOR	WIRE TYPE	CONNECTOR TYPE
12V-3							
Housing: CP-0110800(OviLux) or (equivalent)	1	1	5.6A	COM	BLACK	UL1007	Housing: CP-0110400(OviLux) or (equivalent)
	2	2	5.6A	COM	BLACK		
	6	3	5.6A	+12V	YELLOW		
Terminal: 5PIN 6PIN or (equivalent)	5	4	5.6A	+12V	YELLOW	AWG#18	Terminal: CP-01100102(OviLux) or (equivalent)
	8	1	5.6A	+12V	YELLOW		
P2							
Other	7	2	5.6A	+12V	YELLOW	UL1007	Housing: 45559-1002(Molex) or (equivalent)
	6	3	5.6A	+12V	YELLOW		
	4	4	5.6A	COM	BLACK		
OP-01100102(OviLux) or (equivalent)	3	5	5.6A	COM	BLACK	AWG#18	Terminal: 5556(Molex) or (equivalent)
	2	6	5.6A	COM	BLACK		
	2	6	5.6A	COM	BLACK		

# Removable output harness WH-V0408-500

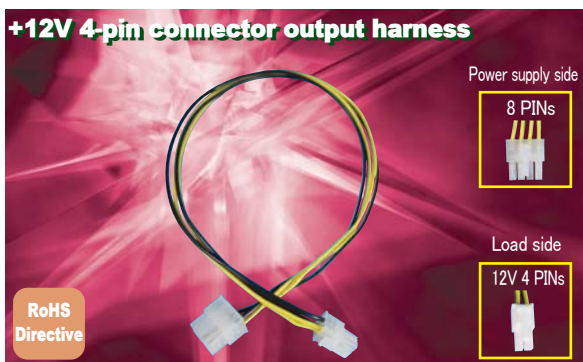

## Dimension

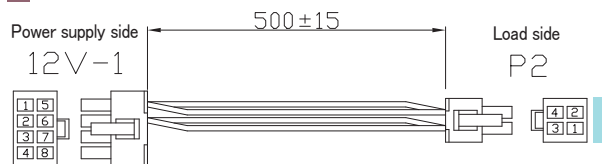

## Product specification

Items	Specification	Measurement condition
Environment	Operating Temp.	-10 to 70°C
	Storage Temp.	-25 to 70°C
	Relative humidity	10 to 95%
Other	Warranty	One year after delivery. However, if any faults belong to us, the defective unit shall be repaired or replaced at our cost.

Model	Stock	Standard Price (Before Tax)
WH-V0408-500	Standard stock	¥200

■ Model name coding

**WH - V 04 08 - 500**

① Wire harness ② for 12V ③ 4 pins for load side  
④ 8 pins for power supply side ⑤ Harness length (mm)

## Applicable power supply

Desktop PC power supply		System rack power supply	
Model	Page	Model	Page
eNSP3-450P series	B-C2	PC1U-300P-E2S	B-E206
eNSP4-500P series	B-C12	PC1U-400P-E2S	B-E196
ePCSA-650P-E2S	B-E2	pNSP2U-550P-AAS	B-F54
ePCSA-600P-E2S	B-E12	pNSP2U-330P-AAS	B-F64
ePCSA-500P-X2S	B-E22		
PCSF-350P-X2S	B-E96		

## Pinout assignment

CONNECTOR TYPE	PIN No.	PIN No.	MAX CURRENT	FUNCTION	WIRE COLOR	WIRE TYPE	CONNECTOR TYPE
12V-1							
Housing: 5557-08R(Molex) or (equivalent)	2	1	5.6A	COM	BLACK	UL1007	Housing: 5557-04R(Molex) or (equivalent)
	1	2	5.6A	COM	BLACK		
	6	3	5.6A	+12V	YELLOW		
Terminal: 5556(Molex) or (equivalent)	5	4	5.6A	+12V	YELLOW	AWG#18	Terminal: 5556(Molex) or (equivalent)
	3	-					
	4	-					
	7	-					
	8	-					

Computer Power Supply - BRAIN

Control & Mechanism System Power Supply - LIMBS

UPDATE

A.

SELECTION GUIDE

B.-A

PRODUCT PAGE GUIDELINE

B.-B

NONSTOP POWER SUPPLY

B.-C

AC+DC DUAL-INPUT PSU

B.-D

GENERAL PURPOSE PC PSU

B.-E

GENERAL PURPOSE REDUNDANT PSU

B.-F

OPTIONS

B.-G

SELECTION GUIDE

C.-A

PRODUCT PAGE GUIDELINE

C.-B

AC-DC SINGLE OUTPUT NONSTOP PSU

C.-C

AC-DC MULTI-OUTPUT NONSTOP PSU

C.-D

AC-DC SINGLE OUTPUT POWER SUPPLY

C.-E

AC-DC MULTI-OUTPUT POWER SUPPLY

C.-F

DC-DC CONVERTER

C.-G

OPTIONS

C.-H

TECHNICAL DICTIONARY

D.

COMPANY PROFILE

E.

BUSINESS MANUAL

F.

INDEX

G.