Removable output harness WH-V0808-500

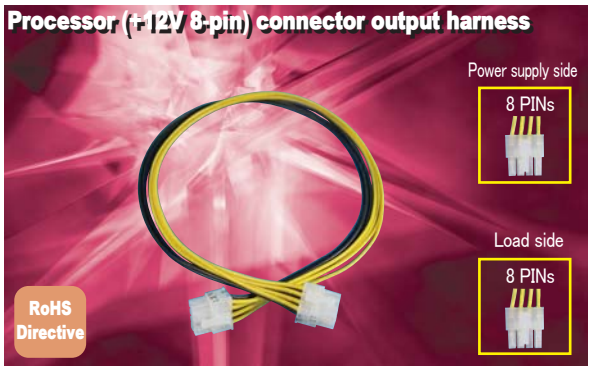

Model	Stock	Standard Price (Before Tax)
WH-V0808-500	Standard stock	¥260

■ Model name coding

WH – V 08 08 – 500

① ② ③ ④ ⑤

① Wire harness
② for 12V
③ 8 pins for load side
④ 8 pins for power supply side
⑤ Harness length (mm)

Applicable power supply

Desktop PC power supply		System rack power supply	
Model	Page	Model	Page
eNSP3-450P series	B-C2	PC1U-300P-E2S	B-E206
eNSP4-500P series	B-C12	PC1U-400P-E2S	B-E196
ePCSA-650P-E2S	B-E2	pNSP2U-550P-AAS	B-F54
ePCSA-600P-E2S	B-E12	pNSP2U-330P-AAS	B-F64
ePCSA-500P-X2S	B-E22		
PCSF-350P-X2S	B-E96		

Dimension

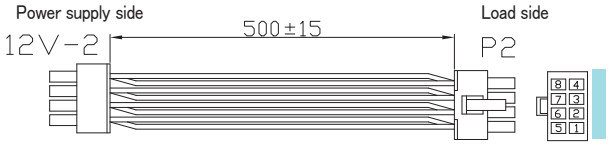

Pinout assignment

CONNECTOR TYPE	PIN No.	PIN No.	MAX CURRENT	FUNCTION	WIRE COLOR	WIRE TYPE	CONNECTOR TYPE
12V-2		P2					
Housing: 5557-08R(Molex) or equivalent Terminal: 5556(Molex) or equivalent	1	1	5.6A	COM	BLACK	UL1007 AWG#18	Housing: 5557-08R(Molex) or equivalent Terminal: 5556(Molex) or equivalent
	2	2	5.6A	COM	BLACK		
	3	3	5.6A	COM	BLACK		
	4	4	5.6A	COM	BLACK		
	5	5	5.6A	+12V	YELLOW		
	6	6	5.6A	+12V	YELLOW		
	7	7	5.6A	+12V	YELLOW		
	8	8	5.6A	+12V	YELLOW		

Product specification

Items		Specification	Measurement condition
Environme	Operating Temp.	-10 to 70℃	Temperature gradient 15℃/H
	Storage Temp.	-25 to 70℃	Temperature gradient 15℃/H
	Relative humidity	10 to 95%	No condensation
Other	Warranty	One year after delivery. However, if any faults belong to us, the defective unit shall be repaired or replaced at our cost.	Provided that the unit shall be operated under normal temp. and humidity, and rating.

Product specification, Design, or Pricing is subject to change without prior notice. Copyright©2007 Nipron Co.,Ltd.