
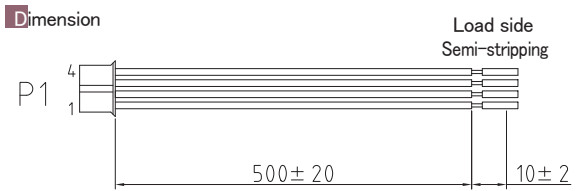


Removable output harness WH-C04PH-500

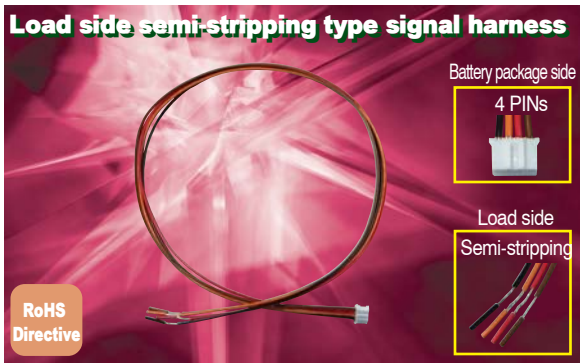

Product specification

Items	Specification	Measurement condition
Environment	Operating Temp.	-10 to 70°C
	Storage Temp.	-25 to 70°C
	Relative humidity	10 to 95%
Other	Warranty	One year after delivery. However, if any faults belong to us, the defective unit shall be repaired or replaced at our cost. Provided that the unit shall be operated under normal temp. and humidity, and rating.

Model	Stock	Standard price (Before Tax)
WH-C04PH-500	Standard stock	¥200

■ Model name coding
WH - C 04PH - 500

- ① Series name
- ② Load side semi-stripping
- ③ 4-pin PH connector for battery package side
- ④ Harness length (mm)

Applicable battery package

Model	Page
BS17A-H24/2.0L	B-G8

Pinout assignment

CONNECTOR TYPE	PIN No.	FUNCTION	WIRE COLOR	WIRE TYPE
P1				
Housing: PHR-4(JST) or equivalent Terminal: SPH-002T-P0.5S(JST) or equivalent	1	BATT LOW	BROWN	UL1007 AWG#24
	2	SHUT DOWN	RED	
	3	(AC FAIL)	ORANGE	
	4	COM	BLACK	

Removable output harness set WHS2828



Set description

Model	Q'ty	Page	Model	Q'ty	Page	Model	Q'ty	Page	Model	Q'ty	Page	Model	Q'ty	Page	Model	Q'ty	Page
WH-M2424-500	1 pcs	B-G30	WH-M2024-500	1 pcs	B-G32	WH-VG208-500	1 pcs	B-G35	WH-V0808-500	1 pcs	B-G36	WH-PP610-850	1 pcs	B-G37	WH-PS610-850	2 pcs	B-G37

Model	Stock	Standard price (Before Tax)
WHS2828	Standard stock	¥5,030

Applicable power supply

Desktop PC power supply		System rack power supply	
Model	Page	Model	Page
eNSP3-450P series	B-C2	pNSP2U-550P-AAAS	B-F54
eNSP4-500P series	B-C12	pNSP2U-330P-AAAS	B-F64
ePCSA-650P-E2S	B-E2		
ePCSA-600P-E2S	B-E12		
ePCSA-500P-X2S	B-E22		
PCSF-350P-X2S	B-E96		