



Removable output harness WH-M2424-500

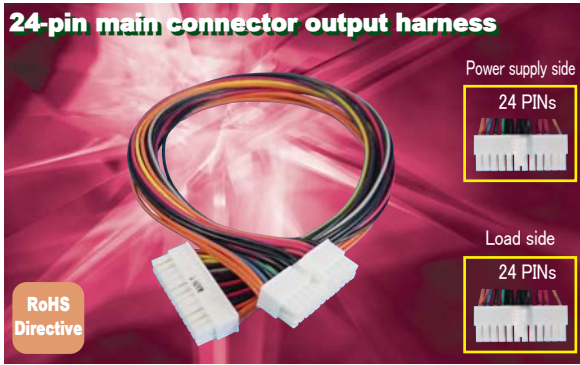

Dimension

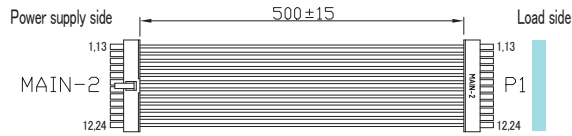

Product specification

Items	Specification	Measurement condition
Environment	Operating Temp.	-10 to 70°C
	Storage Temp.	-25 to 70°C
	Relative humidity	10 to 95%
Other	Warranty	One year after delivery. However, if any faults belong to us, the defective unit shall be repaired or replaced at our cost. Provided that the unit shall be operated under normal temp., humidity and specification.

Model	Stock	Standard Price (Before Tax)
WH-M2424-500	Standard stock	¥720

Model name coding: WH - M 24 24 - 500

- ① Wire harness
- ② Main harness
- ③ 24 pins for load side
- ④ 24 pins for power supply side
- ⑤ Harness length (mm)


Applicable power supply

Desktop PC power supply		System rack power supply	
Model	Page	Model	Page
eNSP3-450P series	B-C2	pNSP2U-550P-AAS	B-F54
eNSP4-500P series	B-C12	pNSP2U-330P-AAS	B-F64
ePCSA-650P-E2S	B-E2		
ePCSA-600P-E2S	B-E12		
ePCSA-500P-X2S	B-E22		
PCSF-350P-X2S	B-E96		


Pinout assignment

CONNECTOR TYPE	PIN No.	PIN No.	MAX CURRENT	FUNCTION	WIRE COLOR	WIRE TYPE	CONNECTOR TYPE	
MAIN-2	13	1	4.8A	+3.3V	ORANGE	UL1007 AWG#18	Housing: CP-01124030(CviLux) or equivalent Terminal: 13PIN CP-01100105(CviLux) or equivalent Other CP-01100102(CviLux) or equivalent	
		2	4.8A	+3.3V	ORANGE			
		3	4.8A	COM	BLACK			
		4	4.8A	+5V	RED			
		5	4.8A	COM	BLACK			
		6	4.8A	+5V	RED			
		7	4.8A	COM	BLACK			
		8	4.8A	PWR OK	GRAY			
		9	4.8A	+5VSB	VIOLET			
		10	4.8A	+12V	YELLOW			
		11	4.8A	+12V	YELLOW			
		12	4.8A	+3.3V	ORANGE			
		13	4.8A	+3.3V SENSE	ORANGE			
		14	4.8A	COM	BLACK			
		15	4.8A	COM	BLACK			
		16	4.8A	PS ON#	GREEN			
		17	4.8A	COM	BLACK			
		18	4.8A	COM	BLACK			
		19	4.8A	COM	BLACK			
		20	20		N.C.			
		21	21	4.8A	+5V			RED
		22	22	4.8A	+5V			RED
		23	23	4.8A	+5V			RED
		24	24	4.8A	COM			BLACK

Removable output harness WH6113-12

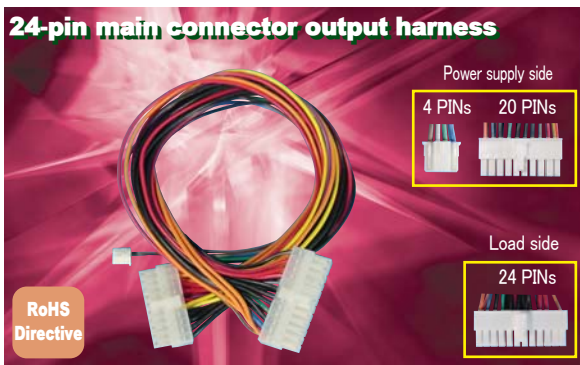

Dimension

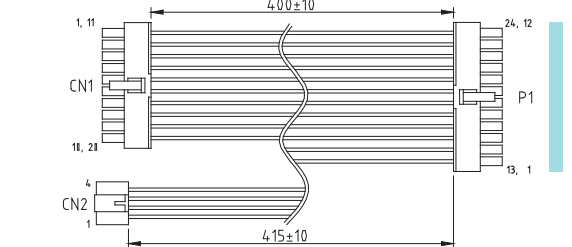

Product specification

Items	Specification	Measurement condition
Environment	Operating Temp.	-10 to 70°C
	Storage Temp.	-25 to 70°C
	Relative humidity	10 to 95%
Other	Warranty	One year after delivery. However, if any faults belong to us, the defective unit shall be repaired or replaced at our cost. Provided that the unit shall be operated under normal temp., humidity and rating.

Model	Stock	Standard Price (Before Tax)
WH6113-12	Standard stock	¥720

Applicable power supply

System rack power supply			
Model	Page	Model	Page
PC1U-300P-E2S	B-E206	PC1U-400P-E2S	B-E196

Pinout assignment

CONNECTOR TYPE	CN	PIN No.	PIN No.	MAX CURRENT	FUNCTION	WIRE COLOR	WIRE TYPE	CONNECTOR TYPE	
MAIN	CN1	1	1	6A	+3.3V	ORANGE	UL1007 AWG#18	Housing: CP-01124030(CviLux) or equivalent Terminal: 13PIN CP-01100105(CviLux) or equivalent Other CP-01100102(CviLux) or equivalent	
			2	6A	+3.3V	ORANGE			
			17	3	6A	COM			BLACK
			13	4	6A	+5V			RED
			18	5	6A	COM			BLACK
			14	6	6A	+5V			RED
			19	7	6A	COM			BLACK
			3	8	10mA	PWR OK			GRAY
			5	9	6A	+5VSB			VIOLET
			6	10	6A	+12V			YELLOW
			16	11	6A	+12V			YELLOW
			11	12	6A	+3.3V			ORANGE
			12	13	6A	+3.3V			ORANGE
			4	13	10mA	+3.3V SENSE			BROWN
			1	14	0.5A	-12V			BLUE
			7	15	6A	COM			BLACK
			2	16	10mA	PS ON#			GREEN
			8	17	6A	COM			BLACK
			9	18	6A	COM			BLACK
			10	19	6A	COM			BLACK
			-	20		N.C.			
			15	21	6A	+5V			RED
			4	22	6A	+5V			RED
			3	23	6A	+5V			RED
20	24	6A	COM	BLACK					