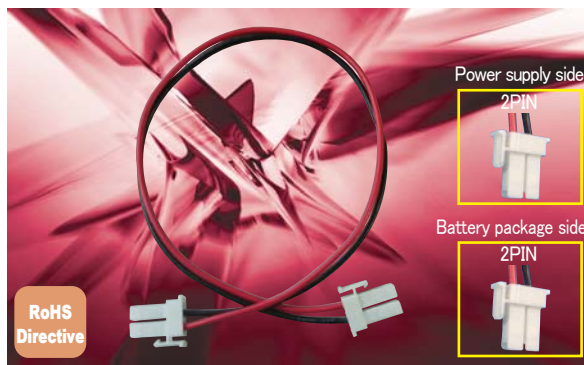
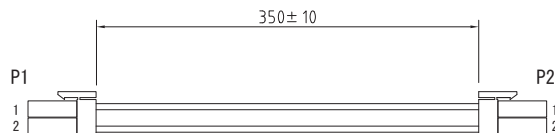


Battery Package Connection Harness WH-02XL02XL-350**Outline Drawing****Product Specification**

Items	Specification	Measurement condition
Environment	Operating temp.	-10 to 70°C
	Storage temp.	-25 to 70°C
	Relative humidity	10 to 95%
Other	Warranty	One year after delivery. If any faults belong to us, the defective unit shall be repaired or replaced at our cost. It shall be used under normal temperature, humidity, and rating.

Model	Stock	Standard Price (Before Tax)
WH-02XL02XL-350	Standard stock	¥250
■ Model Name Coding		
WH-02XL02XL-350	① Wire harness	② 2-pin XL connector of battery package side
① ② ③ ④	③ 2-pin XL connector of power supply side	④ Harness length (mm)

- Power harness for 24V output type OZP series (battery backup is possible) to connect with a battery package and conduct charge/discharge

Compatible Power Supply

Model	Page	Model	Page
OZP-120 series	C-E86	OZP-170 series	C-E104



※It can be connected to OZP series 24V output (with battery backup) type.

Compatible Battery Package

Model	Page
BS14A-H24/2.5L	C-H2

Pin Assignment

CN NAME	CONNECTOR TYPE	PIN No.	FUNCTION	WIRE COLOR	WIRE TYPE
P1 P2	Housing: XLP-02V(JST) or equivalent Terminal: SXF-41T-P0.7(JST) or equivalent	1	BATT+	RED	UL1007 AWG#16
		2	BATT-	BLACK	

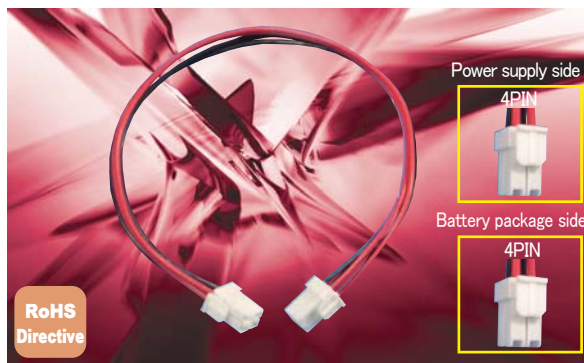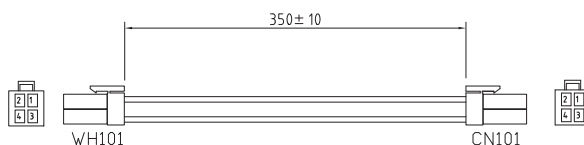Battery Package Connection Harness WH-04XL04XL-350**Outline Drawing****Product Specification**

Items	Specification	Measurement condition
Environment	Operating temp.	-10 to 70°C
	Storage temp.	-25 to 70°C
	Relative humidity	10 to 95%
Other	Warranty	One year after delivery. If any faults belong to us, the defective unit shall be repaired or replaced at our cost. It shall be used under normal temperature, humidity, and rating.

Model	Stock	Standard Price (Before Tax)
WH-04XL04XL-350	Standard stock	¥400
■ Model Name Coding		
WH-04XL04XL-350	① Wire harness	② 4-pin XL connector battery package side
① ② ③ ④	③ 4-pin XL connector power supply side	④ Harness length (mm)

- Power harness for 24V output type GPSA series (battery backup is possible) to connect with a battery package and conduct charge/discharge
- Two harnesses are used when connecting GPSA-750-24-TP and two battery packages. (WH-02XL04XL-350-01 shall be used for GPSA-360-24-TP.)

Compatible Power Supply

Model	Page	Model	Page
GPSA-360-24-TP	C-E122	GPSA-750-24-TP	C-E136

Compatible Battery Package

Model	Page
BS14A-H24/2.5L	C-H2

Pin Assignment

CN NAME	CONNECTOR TYPE	PIN No.	FUNCTION	WIRE COLOR	WIRE TYPE
WH101 CN101	Housing: XLP-04V(JST) or equivalent Terminal: SXF-41T-P0.7(JST) or equivalent	1	BATT+	RED	UL1007 AWG#16
		2	BATT+	RED	
		3	BATT-	BLACK	
		4	BATT-	BLACK	