



# Removable output harness WH-S0303-500

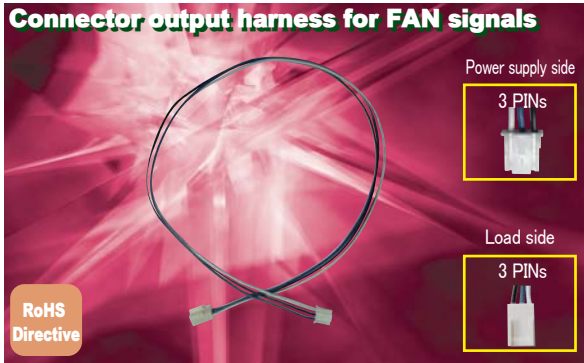

## Dimension



## Product specification

Items	Specification	Measurement condition
Environment	Operating Temp.	-10 to 70°C
	Storage Temp.	-25 to 70°C
	Relative humidity	10 to 95%
Others	Warranty	One year after delivery. However, if any faults belong to us, the defective unit shall be repaired or replaced at our cost. Provided that the unit shall be operated under normal temp. and humidity, and rating.

Model	Stock
WH-S0303-500	Standard stock
<b>Model name coding</b> <b>WH - S 03 03 - 500</b>	
①	① Series name
②	② for signals
③	③ 3 pins for load side
④	④ 3 pins for power supply side
⑤	⑤ Harness length (mm)

## Applicable power supply

Desktop PC power supply		System rack power supply	
Model	Page	Model	Page
ePCSA-650P-E2S	B-E2	PC1U-300P-E2S	B-E206
ePCSA-600P-E2S	B-E12		
PCSF-350P-X2S	B-E96		

## Pinout assignment

CONNECTOR TYPE	PIN No.	PIN No.	MAX CURRENT	WIRE COLOR	WIRE TYPE	CONNECTOR TYPE
SIG-8	2	1	1.6A	BLACK	UL1007 AWG#22	Housing: C13103S0000(CvLux) or equivalent Terminal: SXA-01T-P06(JST) or equivalent
		3	1.6A	BLUE		
		1	1.6A	WHITE		
P12	1	2	1.6A	BLACK	UL1007 AWG#22	Housing: C13103S0000(CvLux) or equivalent Terminal: C131T021BE0(CvLux) or equivalent
		3	1.6A	BLUE		
		1	1.6A	WHITE		