

Model	GPSA-600-12	
Item	Ambient Temperature Drift	

1. Test Conditions (試験条件)

Input Voltage: 100V AC

(入力電圧: AC 100V)

Load Factor: 40%, 60%, 80%, 100%


(負荷率: 40%, 60%, 80%, 100%)

Ambient temperature measuring point: Measured point, Shall be 10cm away from the power supply inlet(Except top side)

(周囲温度測定ポイント:電源のファン吸気口から、上方以外に10cm離れた地点)

2. Test Results (試験結果)

Load Factor [%]	Load Power [W]	Estimated Life Time [H] (推定寿命時間)			
		30°C	40°C	50°C	60°C
40.0	242.4	431,115	215,557	107,779	53,889
60.0	363.6	380,546	190,273	95,137	47,568
80.0	484.8	284,430	142,215	71,107	35,554
100.0	606.0	195,622	97,811	48,906	-

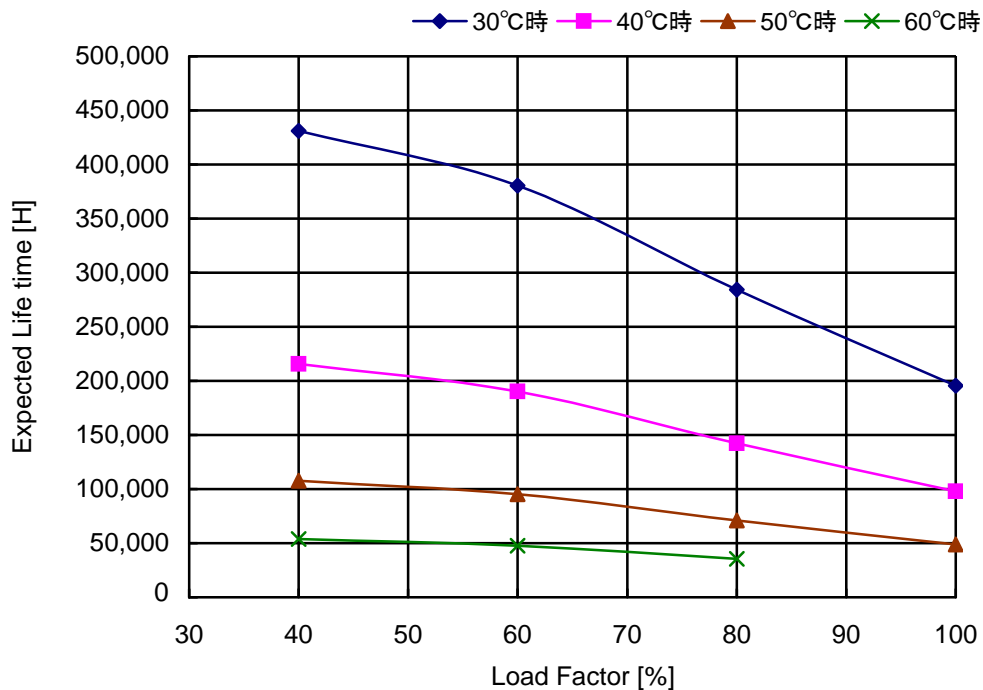

Over the area of 15 years, the degradation of sealing rubber, etc., is not included in the calculation
(15年以上では、封口ゴムの劣化の影響は、計算式には含まれていません)