



Supplemental test data  
(参考資料)

Date of issue: Jul. 25, 2011

# Test Data

Model Number: OZ-030-5

Model Name: DC POWER SUPPLY

INPUT: 85V - 264V AC, 50 / 60 Hz

OUTPUT: 5 V 6.0A

Minimum load : 0W  
Rated load : 30W

Approved by : Makoto Urasue (QA manager)

Designed by : A. Takeda (R&D engineer)

Tested by : Keiichi Sawada (Evaluation test engineer)

**Nipron Co., Ltd.**

## CONTENTS


1. Input Current (by Load Power) .....	1
入力電流(負荷特性)	
2. Efficiency .....	2
効率	
3. Line Regulation .....	3
静的入力変動	
4. Load Regulation .....	4
静的負荷変動	
5. Ambient Temperature Drift .....	5
周囲温度変動	
6. Output Rise Characteristics (at AC Power ON) .....	6
立ち上がり特性(AC 入力電圧投入時)	
7. Output Fall Characteristics (at AC Power OFF) .....	7
立ち下がり特性(AC 入力電圧停止時)	
8. Instantaneous Interruption Compensation (by Load Power) .....	8
瞬時停電保護	
9. Start-Up Voltage .....	9
起動電圧	
10. Input Voltage Sweep Up/Down .....	10
入力電圧緩動試験	
11. Dynamic Load Response .....	11
動的負荷変動	
12. Ripple / Noise Voltage .....	12-13
リップル電圧/ リップルノイズ	
13. Over-Current Protection .....	14
過電流保護	
14. Over-Voltage Protection .....	15
過電圧保護	
15. Inrush Current .....	16
突入電流	
16. Leakage Current .....	17
漏洩電流	

Model	OZ-30-5	Temperature: 25°C																																					
Item	Input Current (by Load Power)																																						
		<table border="1"> <thead> <tr> <th rowspan="2">Load Power [W]</th> <th colspan="4">Input Current [A rms]</th> </tr> <tr> <th>Input Voltage 85V AC</th> <th>Input Voltage 100V AC</th> <th>Input Voltage 240V AC</th> <th>Input Voltage 264V AC</th> </tr> </thead> <tbody> <tr> <td>0.0</td> <td>0.04</td> <td>0.04</td> <td>0.05</td> <td>0.05</td> </tr> <tr> <td>7.5</td> <td>0.21</td> <td>0.19</td> <td>0.13</td> <td>0.13</td> </tr> <tr> <td>15.0</td> <td>0.37</td> <td>0.32</td> <td>0.20</td> <td>0.19</td> </tr> <tr> <td>22.5</td> <td>0.52</td> <td>0.46</td> <td>0.26</td> <td>0.25</td> </tr> <tr> <td>30.0</td> <td>0.68</td> <td>0.60</td> <td>0.33</td> <td>0.32</td> </tr> </tbody> </table>				Load Power [W]	Input Current [A rms]				Input Voltage 85V AC	Input Voltage 100V AC	Input Voltage 240V AC	Input Voltage 264V AC	0.0	0.04	0.04	0.05	0.05	7.5	0.21	0.19	0.13	0.13	15.0	0.37	0.32	0.20	0.19	22.5	0.52	0.46	0.26	0.25	30.0	0.68	0.60	0.33	0.32
Load Power [W]	Input Current [A rms]																																						
	Input Voltage 85V AC	Input Voltage 100V AC	Input Voltage 240V AC	Input Voltage 264V AC																																			
0.0	0.04	0.04	0.05	0.05																																			
7.5	0.21	0.19	0.13	0.13																																			
15.0	0.37	0.32	0.20	0.19																																			
22.5	0.52	0.46	0.26	0.25																																			
30.0	0.68	0.60	0.33	0.32																																			

Model	OZ-30-5	Temperature: 25°C																														
Item	Efficiency																															
<p>■ Efficiency(by Input Voltage)</p> <table border="1"> <thead> <tr> <th>AC Input Voltage [V]</th> <th>50% Load Efficiency [%]</th> <th>Rated Load Efficiency [%]</th> </tr> </thead> <tbody> <tr><td>85</td><td>79.15</td><td>77.23</td></tr> <tr><td>100</td><td>79.87</td><td>79.23</td></tr> <tr><td>132</td><td>79.83</td><td>80.97</td></tr> <tr><td>176</td><td>78.66</td><td>81.77</td></tr> <tr><td>200</td><td>76.84</td><td>81.30</td></tr> <tr><td>220</td><td>75.49</td><td>80.69</td></tr> <tr><td>240</td><td>74.07</td><td>80.60</td></tr> <tr><td>264</td><td>72.29</td><td>79.07</td></tr> </tbody> </table>				AC Input Voltage [V]	50% Load Efficiency [%]	Rated Load Efficiency [%]	85	79.15	77.23	100	79.87	79.23	132	79.83	80.97	176	78.66	81.77	200	76.84	81.30	220	75.49	80.69	240	74.07	80.60	264	72.29	79.07		
AC Input Voltage [V]	50% Load Efficiency [%]	Rated Load Efficiency [%]																														
85	79.15	77.23																														
100	79.87	79.23																														
132	79.83	80.97																														
176	78.66	81.77																														
200	76.84	81.30																														
220	75.49	80.69																														
240	74.07	80.60																														
264	72.29	79.07																														
<p>■ Efficiency(by Load Power)</p> <table border="1"> <thead> <tr> <th rowspan="2">Load Power [W]</th> <th colspan="4">Efficiency [%]</th> </tr> <tr> <th>Input Voltage 85V AC</th> <th>Input Voltage 100V AC</th> <th>Input Voltage 240V AC</th> <th>Input Voltage 264V AC</th> </tr> </thead> <tbody> <tr><td>7.5</td><td>77.44</td><td>76.57</td><td>62.33</td><td>59.51</td></tr> <tr><td>15.0</td><td>79.15</td><td>79.87</td><td>74.07</td><td>72.29</td></tr> <tr><td>22.5</td><td>79.02</td><td>80.38</td><td>78.61</td><td>75.77</td></tr> <tr><td>30.0</td><td>77.23</td><td>79.23</td><td>80.60</td><td>79.07</td></tr> </tbody> </table>				Load Power [W]	Efficiency [%]				Input Voltage 85V AC	Input Voltage 100V AC	Input Voltage 240V AC	Input Voltage 264V AC	7.5	77.44	76.57	62.33	59.51	15.0	79.15	79.87	74.07	72.29	22.5	79.02	80.38	78.61	75.77	30.0	77.23	79.23	80.60	79.07
Load Power [W]	Efficiency [%]																															
	Input Voltage 85V AC	Input Voltage 100V AC	Input Voltage 240V AC	Input Voltage 264V AC																												
7.5	77.44	76.57	62.33	59.51																												
15.0	79.15	79.87	74.07	72.29																												
22.5	79.02	80.38	78.61	75.77																												
30.0	77.23	79.23	80.60	79.07																												

Model	OZ-30-5	Temperature: 25°C
Item	Line Regulation	


## 5V/6A

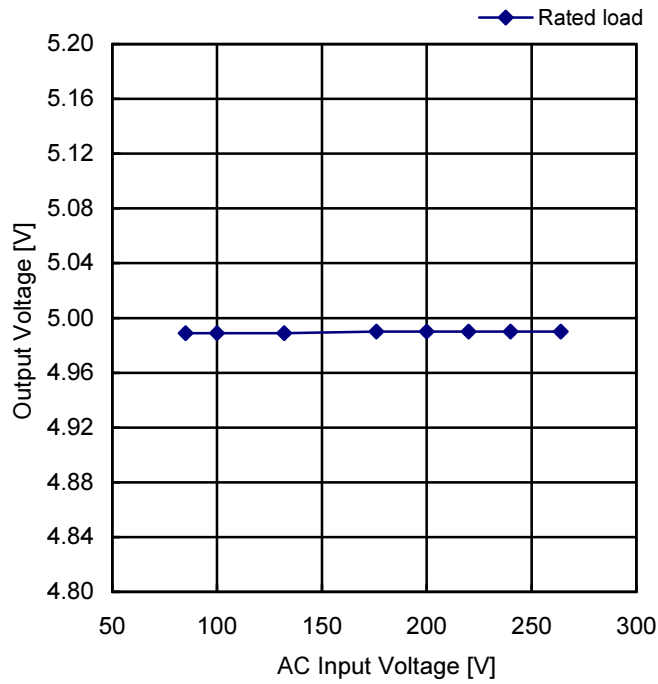

AC Input Voltage [V]	Output Voltage [V]
85	4.989
100	4.989
132	4.989
176	4.99
200	4.99
220	4.99
240	4.99
264	4.99

Model	OZ-30-5	Temperature: 25°C
Item	Load Regulation	

## 5V

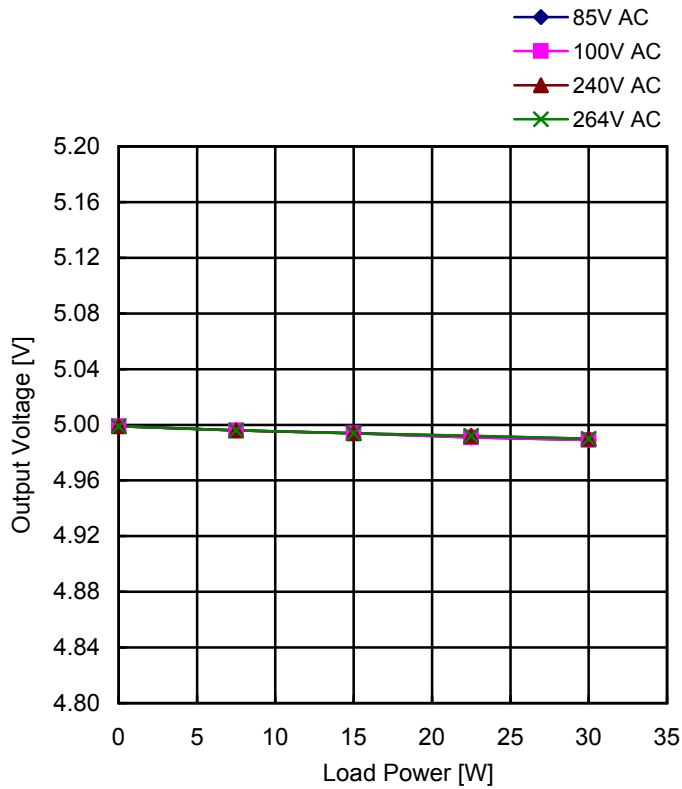


Load Power [W]	Output Voltage [V]			
	Input Voltage 85V AC	Input Voltage 100V AC	Input Voltage 240V AC	Input Voltage 264V AC
0.0	4.999	4.999	4.999	4.999
7.5	4.996	4.996	4.996	4.996
15.0	4.994	4.994	4.994	4.994
22.5	4.991	4.991	4.992	4.992
30.0	4.989	4.989	4.990	4.990
-	-	-	-	-

Load Power [W]	Load Condition	
	Load Current [A]	
	5V	
0.0	0.00	
7.5	1.50	
15.0	3.00	
22.5	4.50	
30.0	6.00	
-	-	

Model	OZ-30-5
Item	Ambient Temperature Drift

## 5V

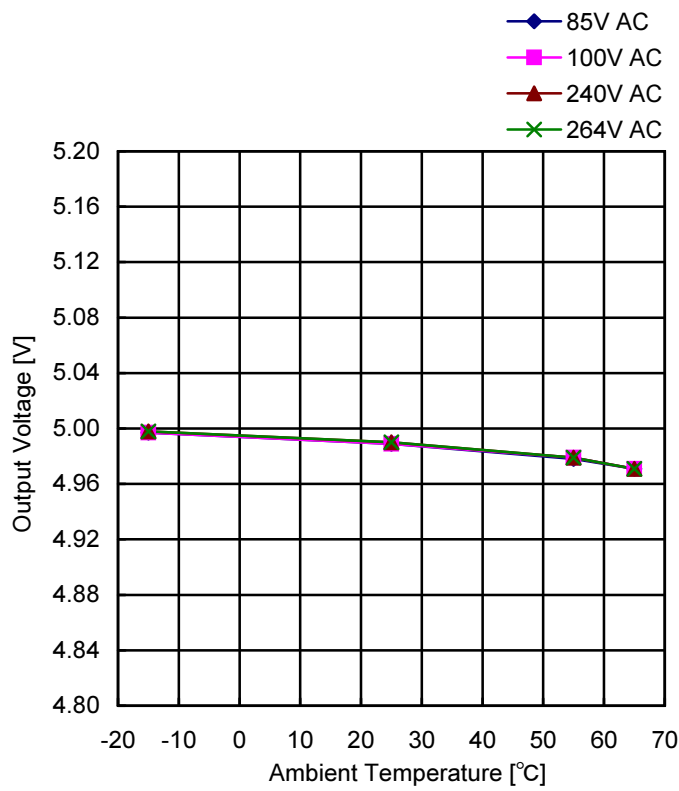

Ambient Temp. (°C)	Output Voltage [V]			
	Input Voltage 85V AC	Input Voltage 100V AC	Input Voltage 240V AC	Input Voltage 264V AC
-15	4.997	4.997	4.998	4.998
25	4.989	4.989	4.990	4.990
55	4.978	4.979	4.979	4.979
65	4.971	4.971	4.971	4.971

### Load Condition


Ambient Temp. (°C)	Load Current [A]
	5V
-15	6.00
25	6.00
55	6.00
65	4.20

Model	OZ-030-5	Temperature: 25°C
Item	Output Rise Characteristics (at AC Power ON)	


Input: 100V AC  
Load: Rated Load

Timebase Range: 500ms/div

Vertical Sensitivity: 1V/div  
Timebase Range: 10ms/div

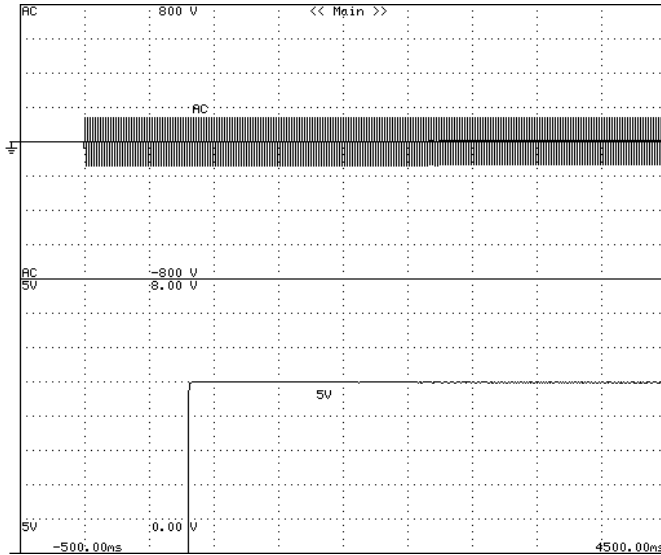

All Output Start-up Sequence

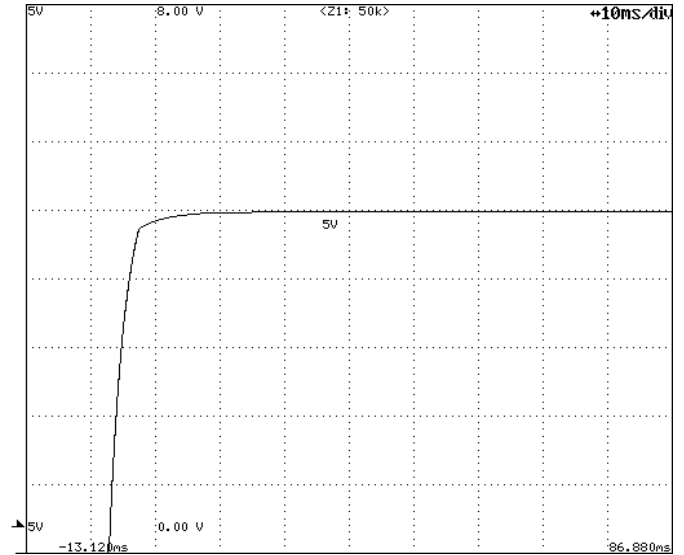


5V DC Output Rise Characteristics


Input: 240V AC  
Load: Rated Load

Timebase Range: 500ms/div

Vertical Sensitivity: 1V/div  
Timebase Range: 10ms/div

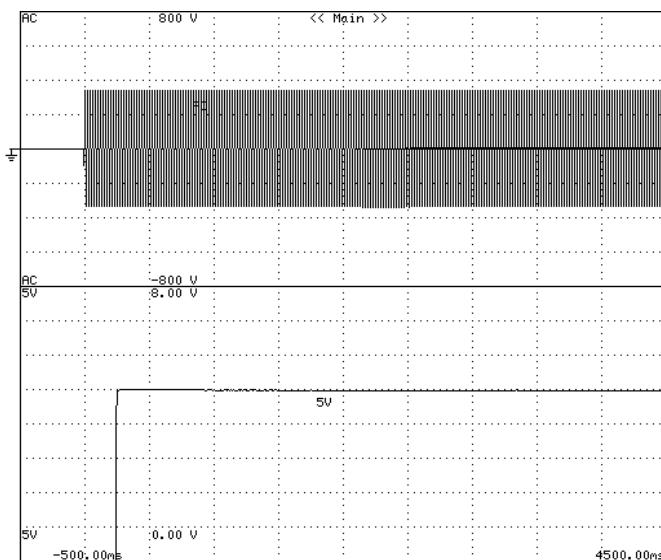

All Output Start-up Sequence

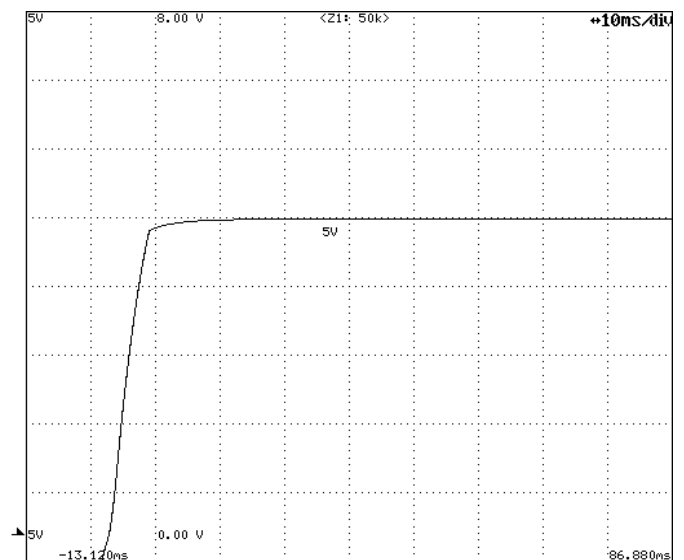


5V DC Output Rise Characteristics



Model	OZ-030-5	Temperature: 25°C
Item	Output Fall Characteristics (at AC Power OFF)	


Input: 100V AC  
Load: Rated Load

Timebase Range: 200ms/div

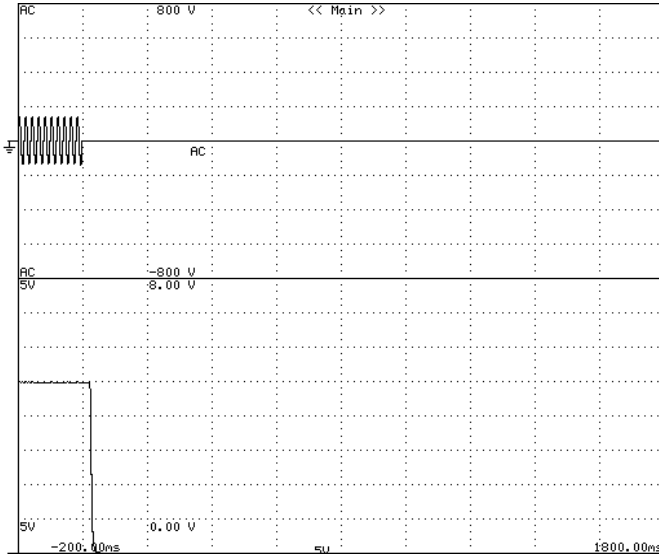

Output Fall Characteristics


Timebase Range: 5ms/div

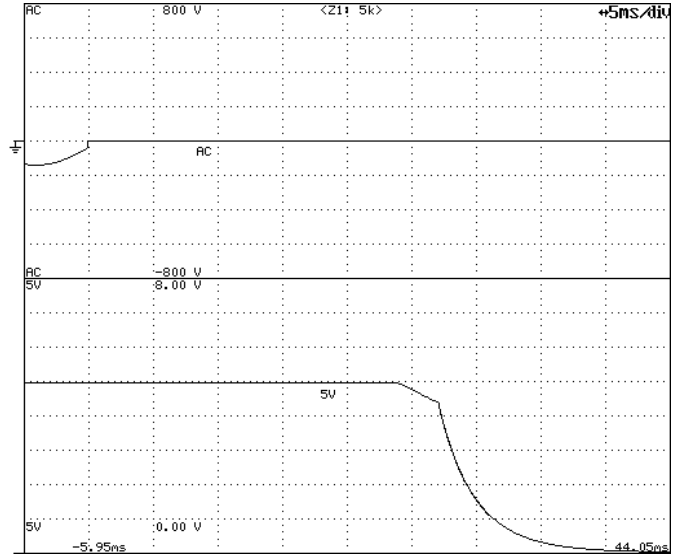

Output Fall Characteristics (magnification)


Input: 240V AC  
Load: Rated Load

Timebase Range: 200ms/div

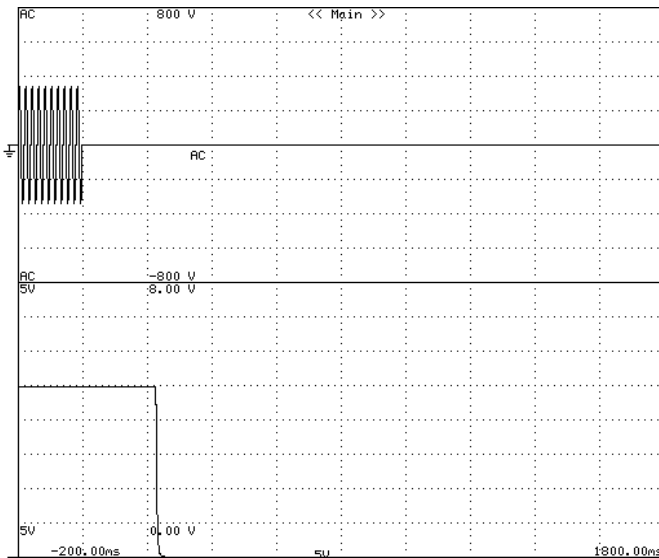

Output Fall Characteristics

Timebase Range: 50ms/div

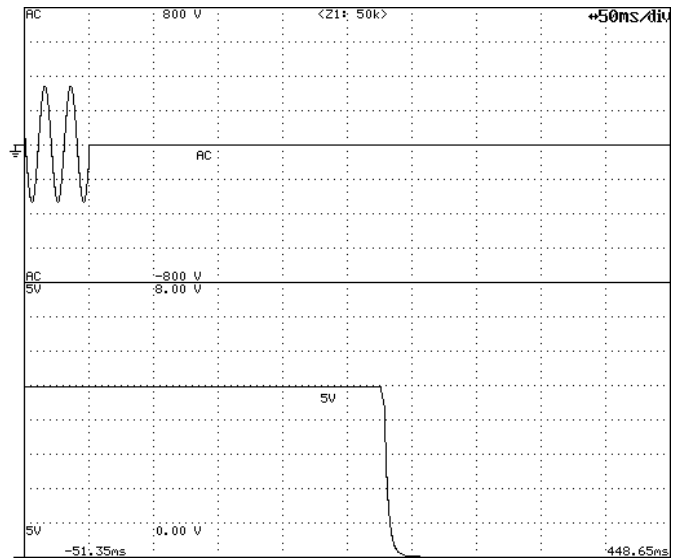


Output Fall Characteristics (magnification)

Model	OZ-030-5	Temperature: 25°C
Item	Instantaneous Interruption Compensation (by Load Power)	


**Input Voltage**



**Output Voltage**

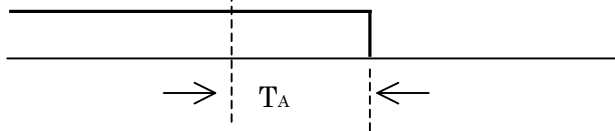


### Input Voltage:100V AC

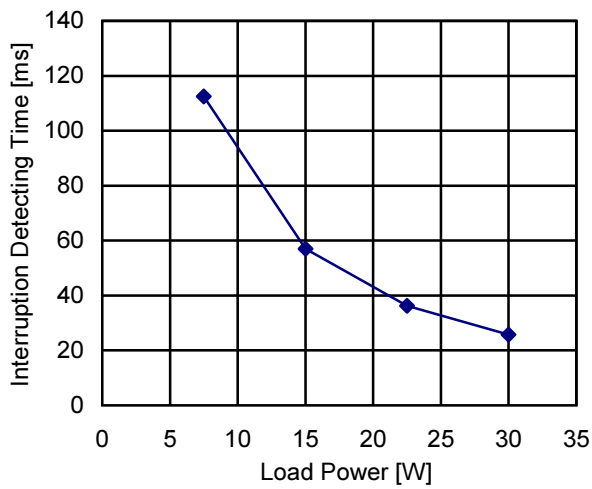

Load Power [W]	Interruption Detecting Time [ms]
	Ouput Voltage
	T <sub>A</sub>
7.5	112.5
15.0	57.0
22.5	36.3
30.0	25.8


### Input Voltage:240V AC

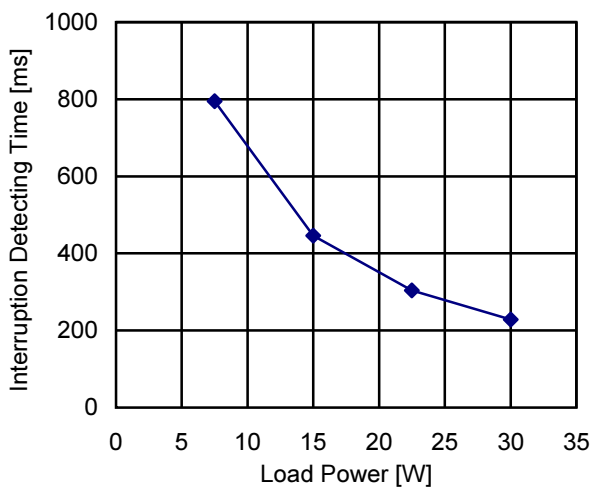

Load Power [W]	Interruption Detecting Time [ms]
	Ouput Voltage
	T <sub>A</sub>
7.5	794.6
15.0	445.8
22.5	304.2
30.0	228.5


Model	OZ-030-5	Temperature: 25°C
Item	Start-Up Voltage	

**Timebase Range: 500ms/div  
Load: Rated Load**

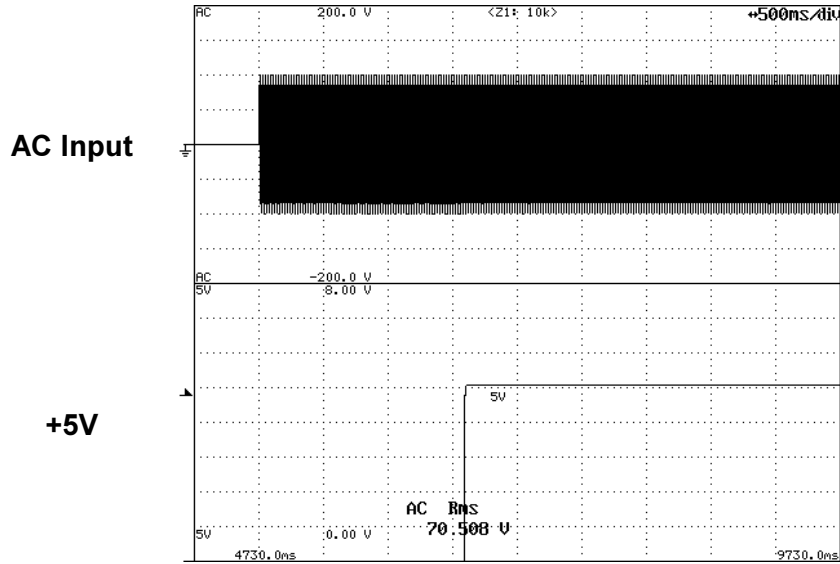

**Start-up Voltage: 70.5V AC**


**Timebase Range: 500ms/div  
Load: Minimum Load**

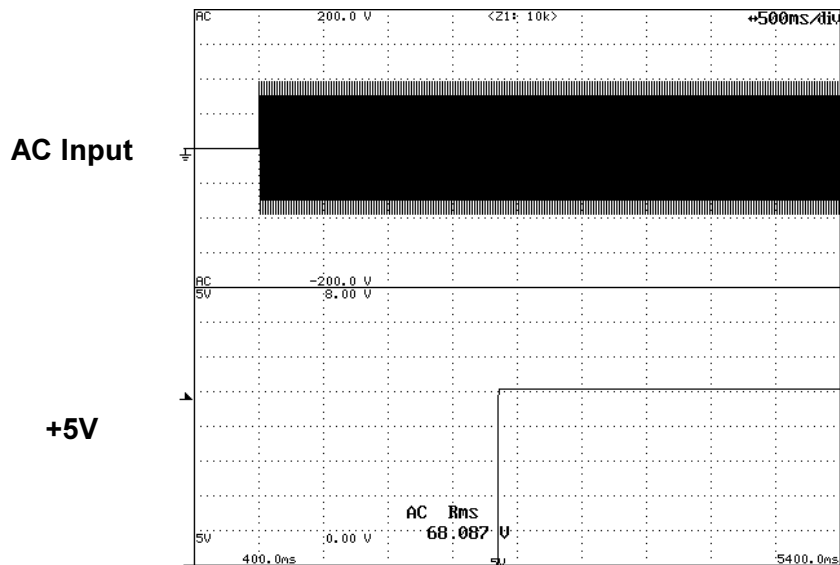

**Start-up Voltage: 68.1V AC**

Model	OZ-030-5	Temperature: 25°C
Item	Input Voltage Sweep Up/Down	



Timebase Range: 5s/div  
Load: Rated Load

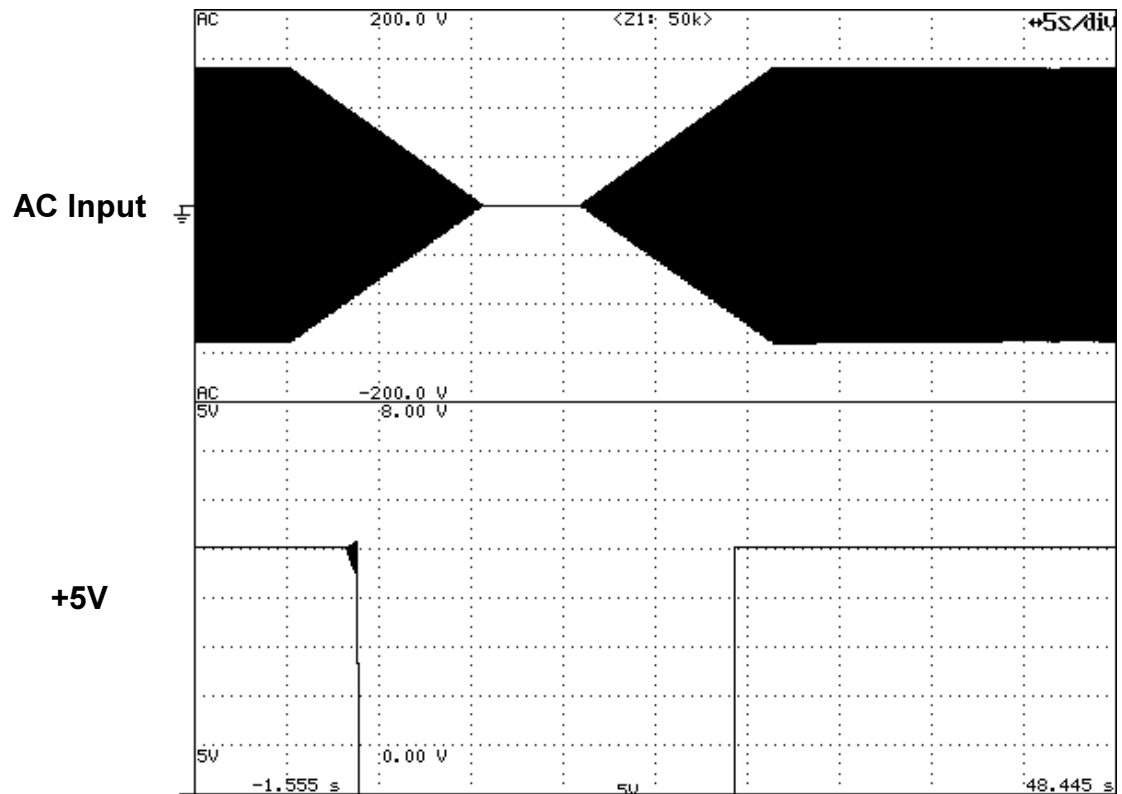

Sweep Rate: 10Vave/sec


Model	OZ-030-5	Temperature: 25°C
Item	Dynamic Load Response	

## +5V DC Output Transient Response Waveforms

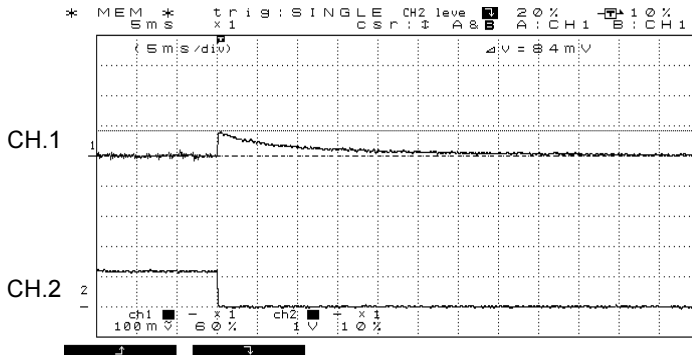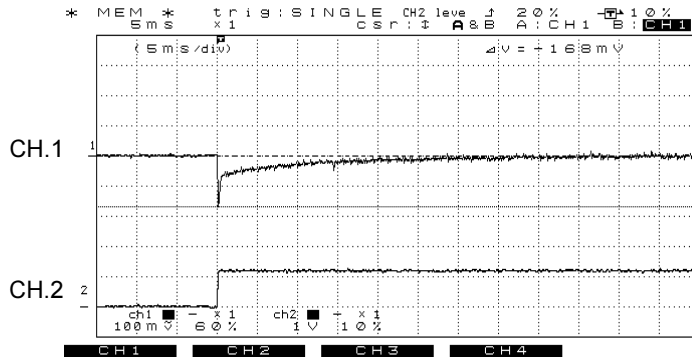

Waveform 1	
CH1	Measuring Point: DC Output Voltage
	Vertical Sensitivity: 100mV/div
CH2	Measuring Point: DC Output Current
	Vertical Sensitivity: 5A/div
Timebase Range	5ms/div
Condition	Input: 100V AC
Note: Rated Load(6A) $\Rightarrow$ Minimum load(0A)	

Model	OZ-30-5	Load: Rated Load
Item	Ambient Temperature Drift	

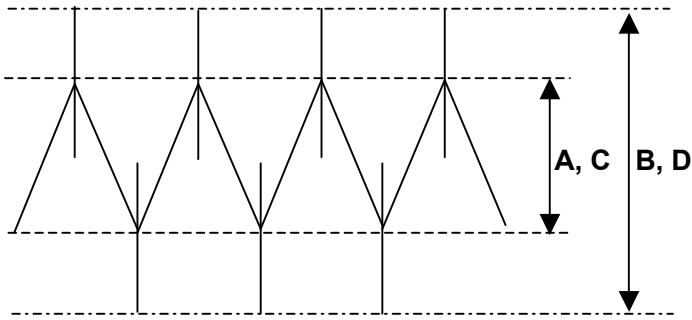

**at 100V AC**

A: Ripple Voltage (mV<sub>P-P</sub>)


B: Noise Voltage (mV<sub>P-P</sub>)

**at 240V AC**

C: Ripple Voltage (mV<sub>P-P</sub>)


D: Noise Voltage (mV<sub>P-P</sub>)

## 5V

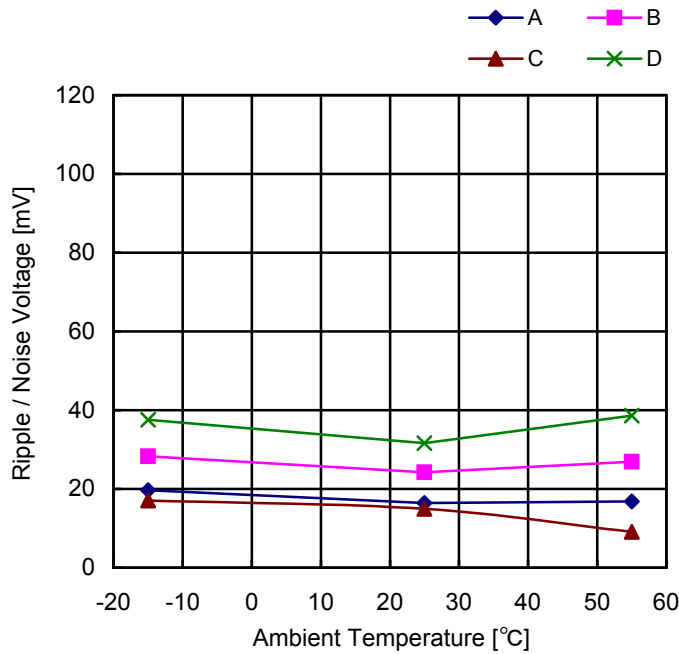

Ambient Temp. [°C]	Ripple / Noise Voltage [mV]			
	A	B	C	D
-15	19.7	28.3	17.1	37.6
25	16.4	24.2	15.0	31.6
55	16.8	26.9	9.1	38.6

Model	OZ-30-5	Temperature: 25°C
Item	Ambient Temperature Drift	

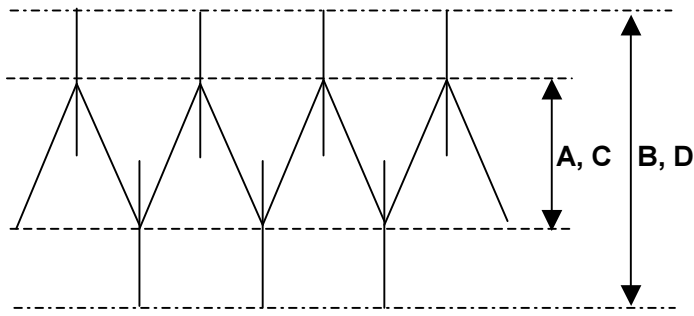

**at 100V AC**

A: Ripple Voltage (mV<sub>P-P</sub>)


B: Noise Voltage (mV<sub>P-P</sub>)

**at 240V AC**

C: Ripple Voltage (mV<sub>P-P</sub>)

D: Noise Voltage (mV<sub>P-P</sub>)


## 5V

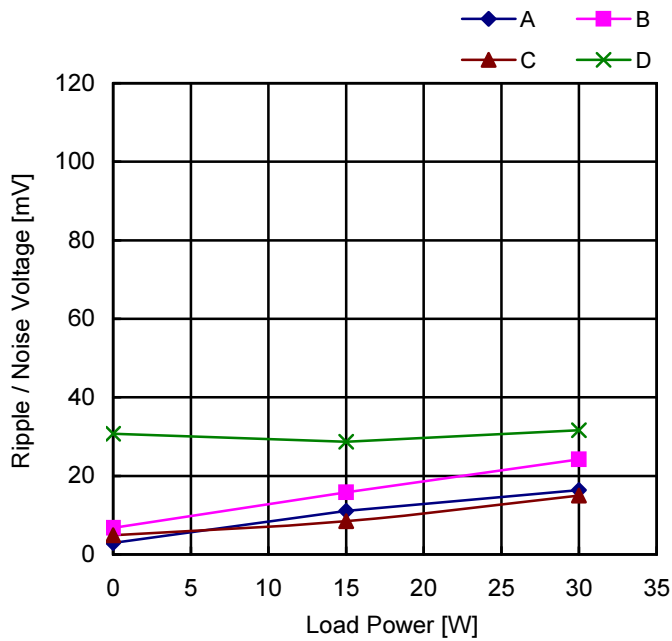

Load Power [W]	Ripple / Noise Voltage [mV]			
	A	B	C	D
0	2.9	6.8	4.9	30.7
15.0	11.1	15.8	8.5	28.7
30.0	16.4	24.2	15.0	31.6

Model	OZ-30-5	Temperature: 25°C
Item	Over-Current Protection	

## V-I Characteristics of 5V O.C.P

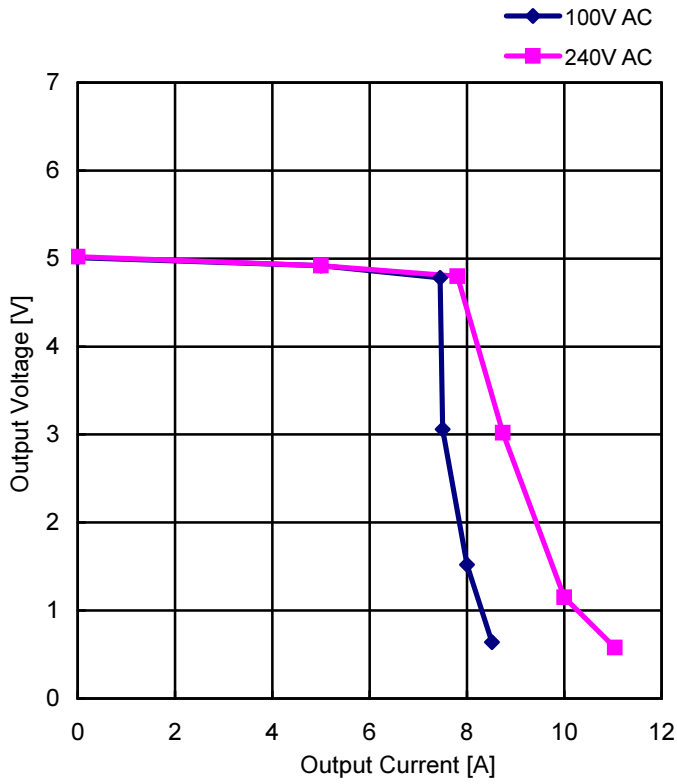


Input Voltage: 100V AC		Input Voltage: 240V AC	
Output Current [A]	Output Voltage [V]	Output Current [A]	Output Voltage [V]
0.00	5.01	0.00	5.02
5.00	4.92	5.00	4.92
7.45	4.78	7.80	4.80
7.50	3.06	8.74	3.02
8.00	1.52	10.00	1.15
8.51	0.64	11.04	0.58



Model	OZ-030-5	Load: Minimum Load
Item	Over-Voltage Protection	


**+5V**

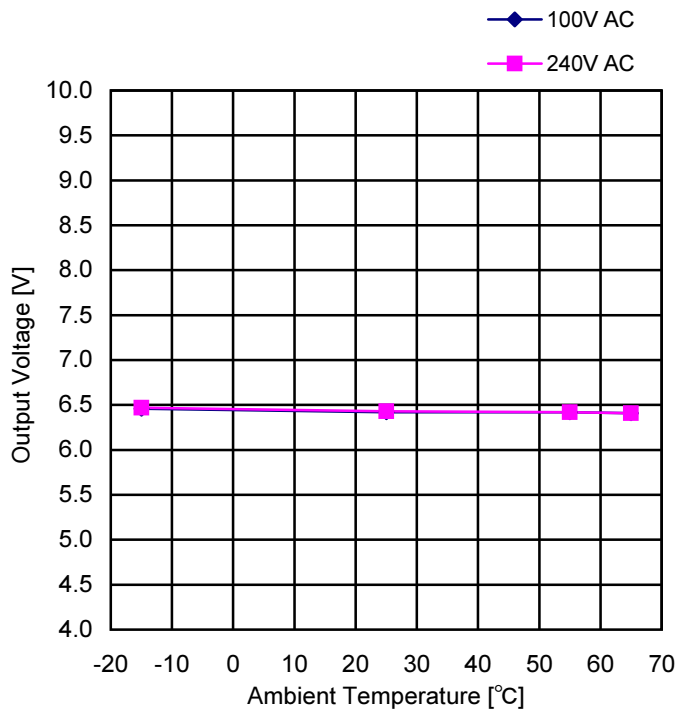


Ambient Temp. [°C]	Output Voltage	
	100V AC	240V AC
-15	6.46	6.47
25	6.42	6.43
55	6.42	6.42
65	6.41	6.41

Model	OZ-030-5	Temperature: 25°C
Item	Inrush Current	Load: Rated Load


## Inrush Current Waveforms

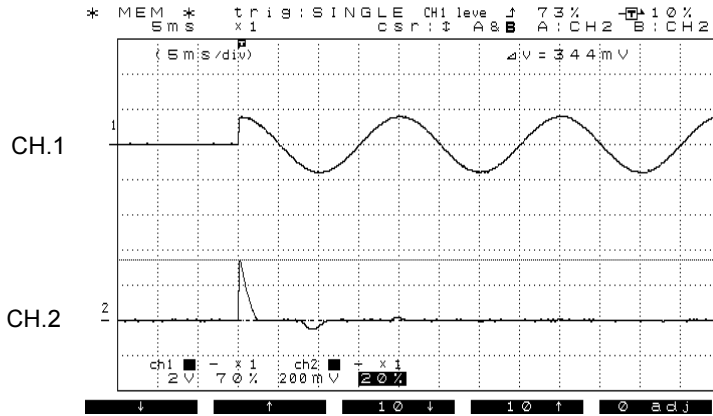

DATA 1	
CH1	Measuring Point: AC Input Voltage
	Range: 200V/div
CH2	Measuring Point: AC Input Current
	Range: 10A/div
Temporal Axis	5ms/div
Conditions	Input: 100V AC Load: Rated Load
Note: Inrush Current: 17.2A	

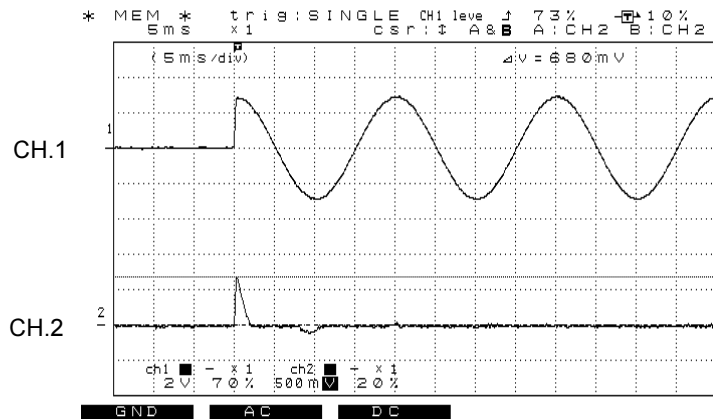

DATA 2	
CH1	Measuring Point: AC Input Voltage
	Range: 200V/div
CH2	Measuring Point: AC Input Current
	Range: 25A/div
Temporal Axis	5ms/div
Conditions	Input: 200V AC Load: Rated Load
Note: Inrush Current: 34.0A	

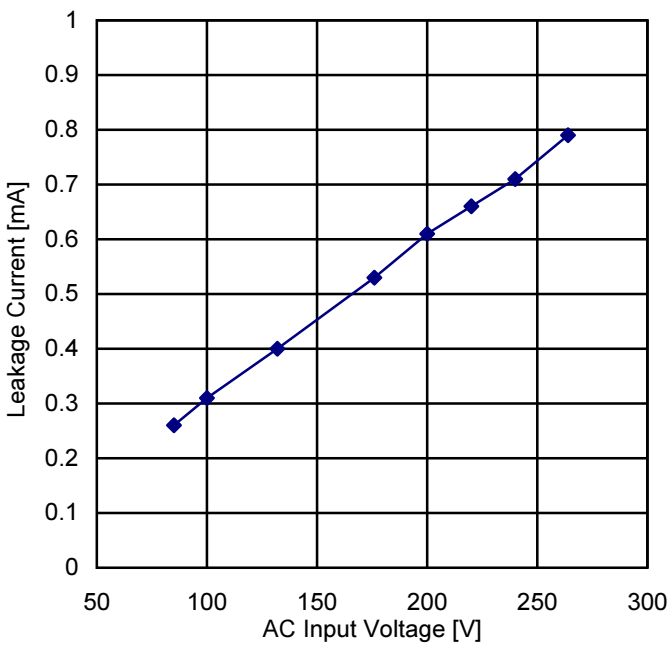Model	OZ-030-5	Load: Rated Load																		
Item	Leakage Current																			
		<table border="1"> <thead> <tr> <th>AC Input Voltage [V]</th> <th>Leakage Current [mA]</th> </tr> </thead> <tbody> <tr> <td>85</td> <td>0.26</td> </tr> <tr> <td>100</td> <td>0.31</td> </tr> <tr> <td>132</td> <td>0.40</td> </tr> <tr> <td>176</td> <td>0.53</td> </tr> <tr> <td>200</td> <td>0.61</td> </tr> <tr> <td>220</td> <td>0.66</td> </tr> <tr> <td>240</td> <td>0.71</td> </tr> <tr> <td>264</td> <td>0.79</td> </tr> </tbody> </table>	AC Input Voltage [V]	Leakage Current [mA]	85	0.26	100	0.31	132	0.40	176	0.53	200	0.61	220	0.66	240	0.71	264	0.79
AC Input Voltage [V]	Leakage Current [mA]																			
85	0.26																			
100	0.31																			
132	0.40																			
176	0.53																			
200	0.61																			
220	0.66																			
240	0.71																			
264	0.79																			